

Product **Contacts: 2, female panel mount connector, solder, screwed from front, 2 - 8 contacts, silver plated contacts, UL approval**


Area **M16 IP67 Series 423/ 723/ 425**

Article number **09 0104 80 02**


Illustration



Scale drawing

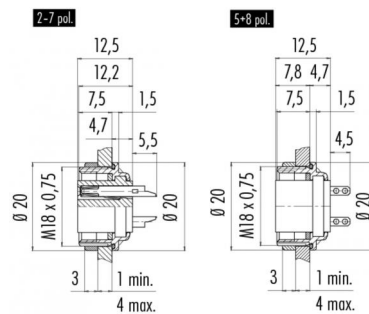

Contact Arrangement



	X	Y
1	-3,50	0,00
2	3,50	0,00

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design female panel mount connector
 Connector locking system bolted
 Termination solder
 Wire gauge (mm) 0,75 mm²
 Wire gauge (AWG) 20
 Upper temperature 95 °C
 Lower temperature -40 °C

Cable data

Approval 1 UL

Electrical parameters

Rated voltage 250 V
 Rated impulse voltage 1500 V
 Pollution degree 1
 Overvoltage category I
 Material group III
 Rated current (40°C) 7 A
 Volume resistivity ≤ 5 mΩ
 EMV compliance shielded
 Degree of protection IP67

Material

Material of contact CuSn (Bronze)
 Contact plating Ag (silver)
 Material of contact body PBT (UL 94 V-0)

Product

Contacts: 2, female panel mount connector, solder, screwed from front, 2 - 8 contacts, silver plated contacts, UL approval

Area

M16 IP67 Series 423/ 723/ 425

Article number

09 0104 80 02

Installation instructions / Mounting cutout

