

Product **Contacts: 3 DIN, male panel mount connector, dip-solder, screwed from the front, silver plated contacts, UL approval**


Area **M16 IP67 Series 423/ 723/ 425**

Article number **09 0107 90 03**


Illustration



Scale drawing

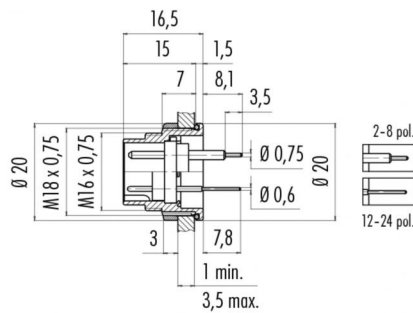

Contact Arrangement



	X	Y
1	3,50	0,00
2	0,00	3,50
3	-3,50	0,00

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design male panel mount connector
 Connector locking system bolted
 Termination dip-solder
 Wire gauge (mm) -
 Wire gauge (AWG) -
 Upper temperature 95 °C
 Lower temperature -40 °C

Cable data

Approval 1 UL

Electrical parameters

Rated voltage 250 V
 Rated impulse voltage 1500 V
 Pollution degree 1
 Overvoltage category I
 Material group III
 Rated current (40°C) 7 A
 Volume resistivity ≤ 5 mΩ
 EMV compliance shielded
 Degree of protection IP67

Material

Material of contact CuZn (Messing)
 Contact plating Ag (silver)
 Material of contact body PBT (UL 94 V-0)

Product

Contacts: 3 DIN, male panel mount connector, dip-solder, screwed from the front, silver plated contacts, UL approval

Area

M16 IP67 Series 423/ 723/ 425

Article number

09 0107 90 03

Installation instructions / Mounting cutout

