


Product	Contacts: 5 Stereo, female panel mount connector, dip-solder, screwed from front, 2 - 8 contacts, silver plated contacts, UL approval
Area	M16 IP67 Series 423/ 723/ 425
Article number	09 0120 90 05


Illustration



Scale drawing

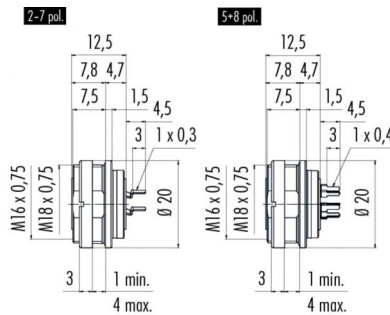

Contact Arrangement



	X	Y
1	-3,50	0,00
2	0,00	3,50
3	3,50	0,00
4	-2,47	2,47
5	2,47	2,47

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	female panel mount connector
Connector locking system	bolted
Termination	dip-solder
Wire gauge (mm)	-
Wire gauge (AWG)	-
Upper temperature	95 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL
------------	----

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	500 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	6 A
Volume resistivity	≤ 5 mΩ
EMV compliance	shielded
Degree of protection	IP67

Material

Material of contact	CuSn (Bronze)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)

Product

Contacts: 5 Stereo, female panel mount connector, dip-solder, screwed from front, 2 - 8 contacts, silver plated contacts, UL approval

Area

M16 IP67 Series 423/ 723/ 425

Article number

09 0120 90 05

Installation instructions / Mounting cutout

