

Product

Contacts: 6 DIN, male panel mount connector, dip-solder, screwed from the front, silver plated contacts, UL approval

Area

M16 IP67 Series 423/ 723/ 425


Article number

09 0123 90 06


Illustration



Scale drawing

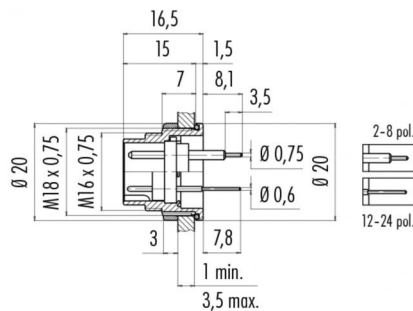

Contact Arrangement



	X	Y
1	3,03	-1,75
2	3,03	1,75
3	0,00	3,50
4	-3,03	1,75
5	-3,03	-1,75
6	0,00	0,00

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	male panel mount connector
Connector locking system	bolted
Termination	dip-solder
Wire gauge (mm)	-
Wire gauge (AWG)	-
Upper temperature	95 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL
------------	----

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	5 A
Volume resistivity	≤ 5 mΩ
EMV compliance	shielded
Degree of protection	IP67

Material

Material of contact	CuZn (Messing)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)

Product

Contacts: 6 DIN, male panel mount connector, dip-solder, screwed from the front, silver plated contacts, UL approval

Area

M16 IP67 Series 423/ 723/ 425

Article number

09 0123 90 06

Installation instructions / Mounting cutout

