Product sheet


Miniature

Product	**Contacts: 7, male panel mount connector, dip-solder, screwed from the front, silver plated contacts, UL approval**
Area	**M16 IP67 Series 423/ 723/ 425**
Article number	**09 0127 90 07**


Illustration



Scale drawing

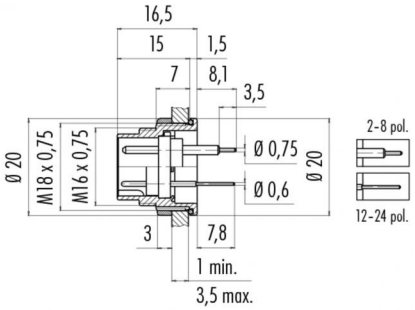

Contact Arrangement



	X	Y
1	-1,75	-3,03
2	-3,50	0,00
3	-1,75	3,03
4	1,75	3,03
5	3,50	0,00
6	1,75	-3,03
7	0,00	0,00

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	male panel mount connector
Connector locking system	bolted
Termination	dip-solder
Wire gauge (mm)	-
Wire gauge (AWG)	-
Upper temperature	95 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	800 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	5 A
Volume resistivity	≤ 5 mΩ
EMV compliance	shielded
Degree of protection	IP67

Material

Material of contact	CuZn (Messing)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)

Product	**Contacts: 7, male panel mount connector, dip-solder, screwed from the front, silver plated contacts, UL approval**
Area	**M16 IP67 Series 423/ 723/ 425**
Article number	**09 0127 90 07**

Installation instructions / Mounting cutout

