

Product **Contacts: 12, male panel mount connector with flexible plate, screwed from front, gold plated contacts, double-row**


Area **M16 IP67 Series 423/ 723/ 425**

Article number **09 0131 68 12**

Illustration



Scale drawing

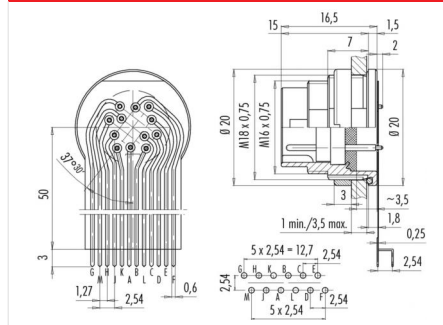

Contact Arrangement

	X	Y
A	0,44	-3,45
B	-2,29	-3,61
C	-4,10	-1,21
D	-3,20	1,34
E	-2,71	3,59
F	-0,41	3,45
G	2,29	3,61
H	4,10	1,21
J	3,20	-1,34
K	2,71	-3,59
L	-2,00	-1,51
M	2,00	1,51

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design male panel mount connector

Connector locking system bolted

Termination dip-solder

Wire gauge (mm) -

Wire gauge (AWG) -

Upper temperature 95 °C

Lower temperature -40 °C

Electrical parameters

Rated voltage 60 V

Rated impulse voltage 500 V

Pollution degree 1

Overvoltage category I

Material group III

Rated current (40°C) 3 A

Volume resistivity ≤ 3 mΩ

EMV compliance shielded

Degree of protection IP67

Material

Material of contact CuZn (Messing)

Contact plating Au (gold)

Material of contact body PBT (UL 94 V-0)

Product

Contacts: 12, male panel mount connector with flexible plate, screwed from front, gold plated contacts, double-row

Area

M16 IP67 Series 423/ 723/ 425

Article number

09 0131 68 12

Installation instructions / Mounting cutout

