

Product **Contacts: 5 Stereo, female panel mount connector, dip-solder, screwed from front, 2 - 8 contacts, silver plated contacts**


Area **M16 IP40 Series 581/ 680/ 682**

Article number **09 0320 90 05**


Illustration



Scale drawing

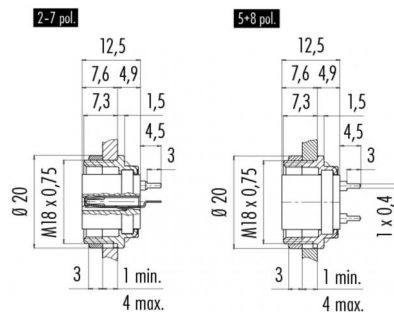

Contact Arrangement



	X	Y
1	-3,50	0,00
2	0,00	3,50
3	3,50	0,00
4	-2,47	2,47
5	2,47	2,47

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design female panel mount connector
 Connector locking system bolted
 Termination dip-solder
 Wire gauge (mm) -
 Wire gauge (AWG) -
 Upper temperature 85 °C
 Lower temperature -40 °C

Electrical parameters

Rated voltage 60 V
 Rated impulse voltage 500 V
 Pollution degree 1
 Overvoltage category I
 Material group III
 Rated current (40°C) 6 A
 Volume resistivity ≤ 5 mΩ
 EMV compliance shielded
 Degree of protection IP40
 Mechanical operation > 500 Mating cycles

Material

Material of contact CuSn (Bronze)
 Contact plating Ag (silver)
 Material of contact body PBT (UL 94 V-0)

Product

Contacts: 5 Stereo, female panel mount connector, dip-solder, screwed from front, 2 - 8 contacts, silver plated contacts

Area

M16 IP40 Series 581/ 680/ 682

Article number

09 0320 90 05

Installation instructions / Mounting cutout

