

Product **Contacts: 4, Fixing thread: M12x0.5, male panel mount connector, fixing thread**


Area **M12-B Series 715/766**

Article number **09 0431 90 04**


Illustration



Scale drawing



Contact Arrangement



	X	Y
1	2,50	0,00
2	0,00	2,50
3	-2,50	0,00
4	0,00	-2,50

- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	male panel mount connector
Connector locking system	bolted
Termination	solder
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Upper temperature	85 °C
Lower temperature	-40 °C

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	III
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PA

Product

Contacts: 4, Fixing thread: M12x0.5, male panel mount connector, fixing thread


Area

M12-B Series 715/766

Article number

09 0431 90 04

Installation instructions / Mounting cutout

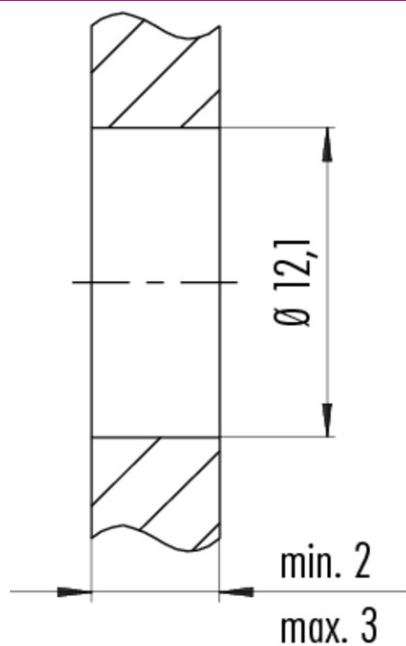

Anzugsdrehmoment/Tightening torque
M12 x 1 6,25 Nm