

Product **Contacts: 3+PE, male panel mount connector, Power, S-Coding, front fastened, with single wires, fixing thread M16x1,5**


Area **M12-S Series 814**

Article number **09 0691 121 04**


Illustration



Scale drawing

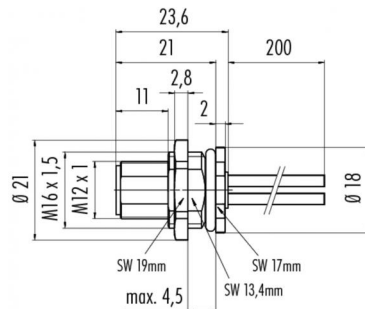

Contact Arrangement



- 1 schwarz/black
- 2 schwarz/black
- 3 schwarz/black
- 4 gelb/grün/yellow/green

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	male panel mount connector
Connector locking system	bolted
Termination	single wires
Wire gauge (mm)	max. 1,5 mm ²
Wire gauge (AWG)	16
Cable outlet	-
Upper temperature	85 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL
------------	----

Electrical parameters

Rated voltage	630 V
Rated impulse voltage	6000 V
Pollution degree	3
Overvoltage category	III
Material group	III
Rated current (40°C)	12 A
Volume resistivity	≤ 5 mΩ
Degree of protection	IP68
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PA

Product

Contacts: 3+PE, male panel mount connector, Power, S-Coding, front fastened, with single wires, fixing thread M16x1,5

Area

M12-S Series 814


Article number

09 0691 121 04

Installation instructions / Mounting cutout

Mit Fläche als Verdrehschutz
With flats as anti-rotation device

Mit Durchgangsbohrung
With bore hole

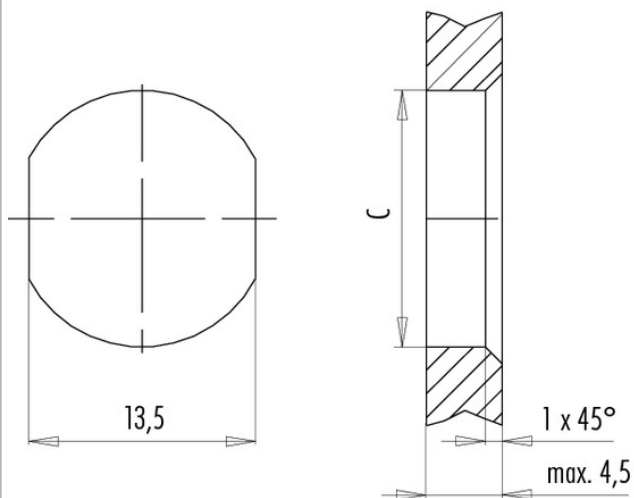

	C
PG 9	15,3
M16x1,5	16,1

Anzugsdrehmoment/Tightening torque

Metallgehäuse/Metal housing 6,25 Nm
Kunststoffgehäuse/Plastic housing 3,75 Nm