
Product sheet


Automation Technology

Product	**Contacts: 3, cable: 3 x 0.14 mm², male panel mount connector with single wires**
Area	**M5 Series 707**
Article number	**09 3105 00 03**


Illustration

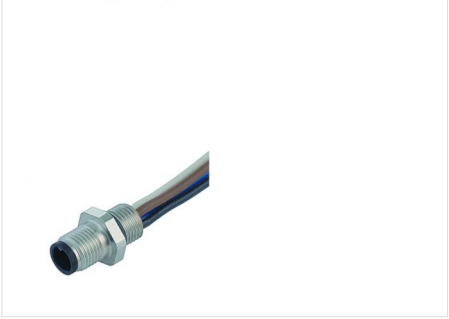

Scale drawing

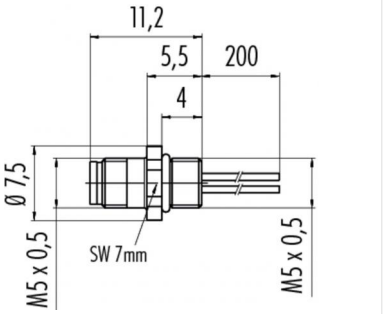

Contact Arrangement



1 braun
2 nicht konfektioniert
3 blau
4 schwarz

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	male panel mount connector
Connector locking system	bolted
Termination	assembled with wires
Wire gauge (mm)	0,14 mm²
Wire gauge (AWG)	26
Cable outlet	-
Upper temperature	80 °C
Lower temperature	-25 °C

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	I
Rated current (40°C)	1 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PA

Product	**Contacts: 3, cable: 3 x 0.14 mm², male panel mount connector with single wires**
Area	**M5 Series 707**
Article number	**09 3105 00 03**

Installation instructions / Mounting cutout

