


Product	Contacts: 3, male panel mount connector with single wires 3 x 0.14 mm², screwed from front
Area	M5 Series 707
Article number	09 3105 86 03


Illustration



Scale drawing

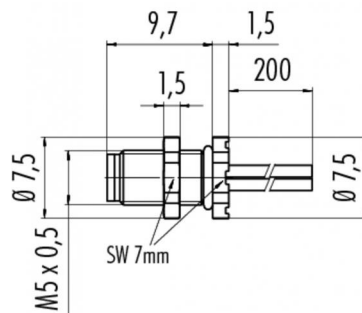

Contact Arrangement



- 1 braun
- 2 nicht konfektioniert
- 3 blau
- 4 schwarz

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	male panel mount connector
Connector locking system	bolted
Termination	assembled with wires
Wire gauge (mm)	0,14 mm ²
Wire gauge (AWG)	26
Cable outlet	-
Upper temperature	80 °C
Lower temperature	-25 °C

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	I
Rated current (40°C)	1 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PA

Product	Contacts: 3, male panel mount connector with single wires 3 x 0.14 mm², screwed from front
Area	M5 Series 707
Article number	09 3105 86 03

Installation instructions / Mounting cutout

