Product sheet


Subminiature

Product	**Contacts: 3, cable plug connector with strain relief, max. cable outlet 4 mm**
Area	**Snap-in IP40 Series 719**
Article number	**09 9747 70 03**

Illustration



Scale drawing

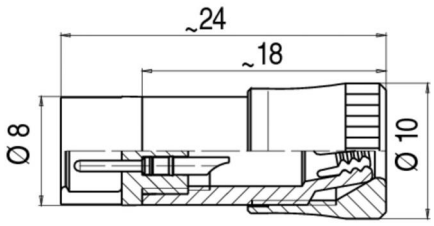

Contact Arrangement



	X	Y
1	1,20	–0,70
2	0,00	1,40
3	–1,20	–0,70

You can find the item description on the next page.

Technical data

General features

Connector Design	Cable Connector
Connector locking system	snap
Termination	solder
Wire gauge (mm)	0,25 mm²
Wire gauge (AWG)	24
Cable outlet	2,5-4 mm
Upper temperature	70 °C
Lower temperature	-25 °C

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	1
Overvoltage category	II
Material group	III
Rated current (40°C)	3 A
Volume resistivity	≤ 3 mΩ
EMV compliance	Shielding is not possible
Degree of protection	IP40
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PA

Product sheet

Subminiature

Product	**Contacts: 3, cable plug connector with strain relief, max. cable outlet 4 mm**
Area	**Snap-in IP40 Series 719**
Article number	**09 9747 70 03**

Item description

