

Product **Contacts: 5, male panel mount connector, solder**


Area **Snap-in IP40 Series 709/719**

Article number **09 9791 30 05**


Illustration



Scale drawing



Contact Arrangement



	X	Y
1	0,88	-1,21
2	1,42	0,46
3	0,00	1,49
4	-1,42	0,46
5	-0,88	-1,21

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design male panel mount connector

Connector locking system snap

Termination solder

Wire gauge (mm) 0,25 mm²

Wire gauge (AWG) 24

Cable outlet -

Upper temperature 70 °C

Lower temperature -25 °C

Electrical parameters

Rated voltage 60 V

Rated impulse voltage 800 V

Pollution degree 1

Overvoltage category II

Material group III

Rated current (40°C) 3 A

Volume resistivity ≤ 3 mΩ

EMV compliance Shielding is not possible

Degree of protection IP40

Mechanical operation > 100 Mating cycles

Material


Material of contact CuZn (Messing)

Contact plating Au (gold)

Material of contact body PA

Product	Contacts: 5, male panel mount connector, solder
Area	Snap-in IP40 Series 709/719
Article number	09 9791 30 05

Item description

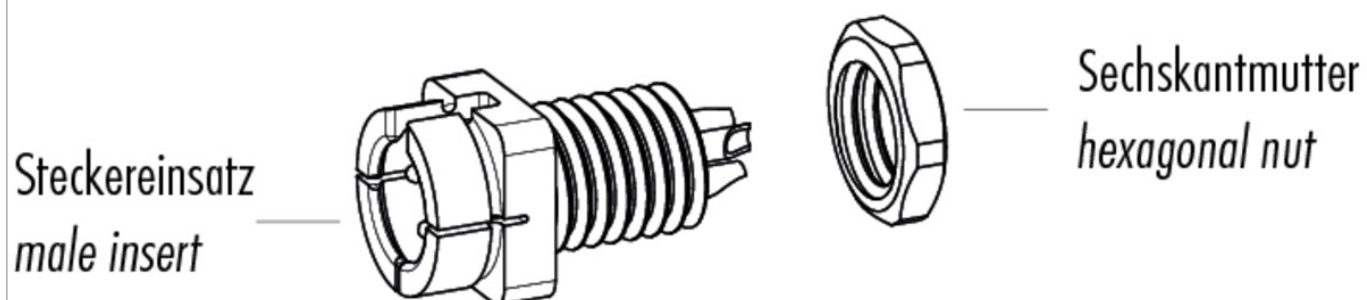

Installation instructions / Mounting cutout

