

Product **Contacts: 5, female panel mount connector, dip-solder**


Area **Snap-in IP40 Series 709/719**

Article number **09 9792 20 05**


Illustration



Scale drawing



Contact Arrangement



	X	Y
1	-0,88	-1,21
2	-1,42	0,46
3	0,00	1,49
4	1,42	0,46
5	0,88	-1,21

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design	female panel mount connector
Connector locking system	snap
Termination	dip-solder
Wire gauge (mm)	-
Cable outlet	-
Upper temperature	70 °C
Lower temperature	-25 °C

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	1
Overvoltage category	II
Material group	III
Rated current (40°C)	3 A
Volume resistivity	≤ 3 mΩ
EMV compliance	Shielding is not possible
Degree of protection	IP40
Mechanical operation	> 100 Mating cycles


Material

Material of contact	CuSn (Bronze)
Contact plating	Au (gold)
Material of contact body	PA

Product **Contacts: 5, female panel mount connector, dip-solder**

Area **Snap-in IP40 Series 709/719**
Article number **09 9792 20 05**

Item description

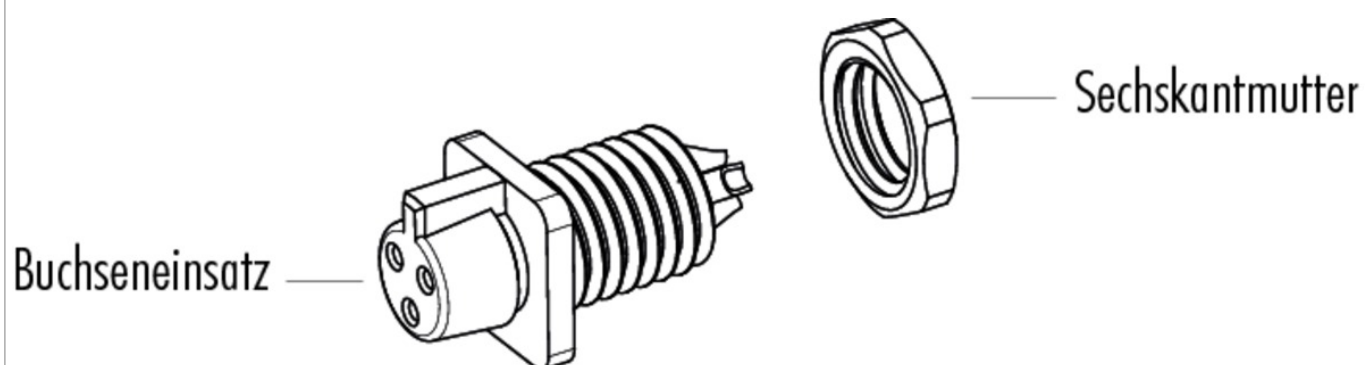

Installation instructions / Mounting cutout

