


Product **Contacts: 5, female panel mount connector, solder**
Area **Snap-in IP40 Series 709/719**
Article number **09 9792 30 05**


Illustration



Scale drawing



Contact Arrangement



	X	Y
1	-0,88	-1,21
2	-1,42	0,46
3	0,00	1,49
4	1,42	0,46
5	0,88	-1,21

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design female panel mount connector
Connector locking system snap
Termination solder
Wire gauge (mm) 0,25 mm²
Wire gauge (AWG) 24
Cable outlet -
Upper temperature 70 °C
Lower temperature -25 °C

Electrical parameters


Rated voltage 60 V
Rated impulse voltage 800 V
Pollution degree 1
Overvoltage category II
Material group III
Rated current (40°C) 3 A
Volume resistivity ≤ 3 mΩ
EMV compliance Shielding is not possible
Degree of protection IP40
Mechanical operation > 100 Mating cycles

Material

Material of contact CuSn (Bronze)
Contact plating Au (gold)
Material of contact body PA

Product	Contacts: 5, female panel mount connector, solder
Area	Snap-in IP40 Series 709/719
Article number	09 9792 30 05

Item description

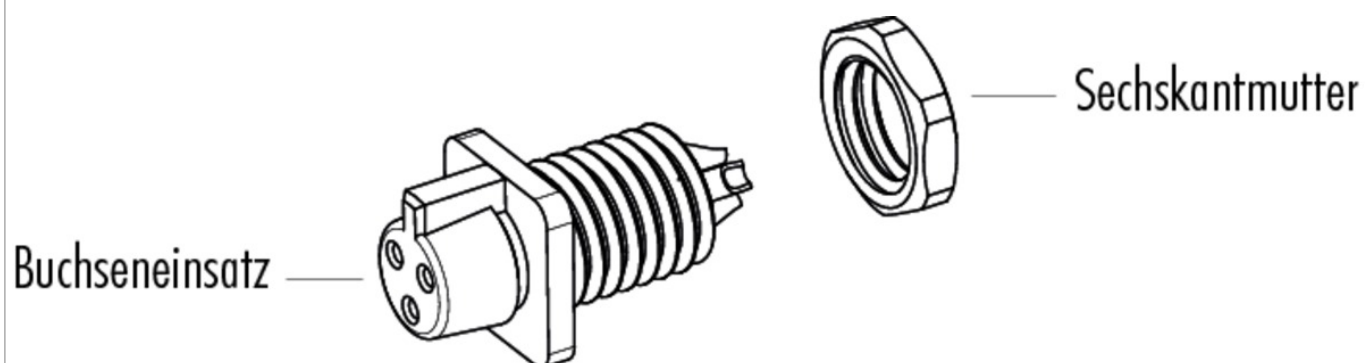

Installation instructions / Mounting cutout

