Product sheet


Automation Technology

Product	**Contacts: 8, cable length 2 m, cable: 8 x 0,25, cable jacket PVC, male angled connector moulded, screw version, M8x1, stainless steel locking system**
Area	**M8 Series 718**
Article number	**77 3703 0000 20008-0200**


Illustration



Scale drawing

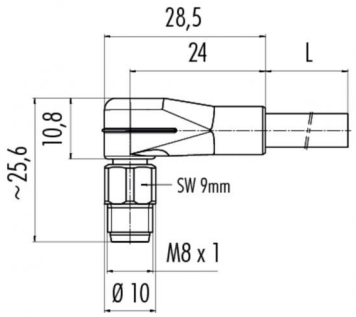

Contact Arrangement



1 weiß/*white*
2 braun/*brown*
3 grün/*green*
4 gelb/*yellow*
5 grau/*grey*
6 rosa/*pink*
7 blau/*blue*
8 rot/*red*

Technical data

General features

Connector Design	male angled connector
Connector locking system	bolted
Termination	crimp, moulded on cable
Wire gauge (mm)	0,25 mm²
Wire gauge (AWG)	(24)
Cable outlet	-
Upper temperature	85 °C
Lower temperature	-25 °C

Cable data

material housing	PVC
Insulation single lead	PVC
Single lead structure	32 x 0,1
Cable sheath Ø	6
Conductor resistance	<79Ω/Km
Temperature range cable movable °C from	-5
Temperature range cable movable °C to	105
Temperature range cable fixed °C from	-40
Temperature range cable fixed °C to	105
Bending radius cable fixed	min. 5 x D
Bending radius cable movable	min. 10 x D
Approval 1	UL listed
Cable diameter	6

Electrical parameters

Rated voltage	30 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	1,5 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PUR
Material of housing	PUR

c UL us LISTED