

Product **Contacts: 3, cable plug connector overmoulded, unshielded, cable length 2 m**


Area **M9 IP67 Series 702**

Article number **79 1451 212 03**


Illustration



Scale drawing

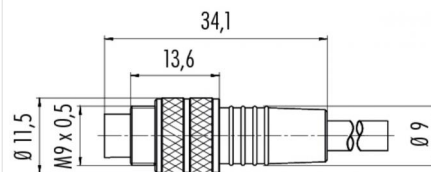

Contact Arrangement

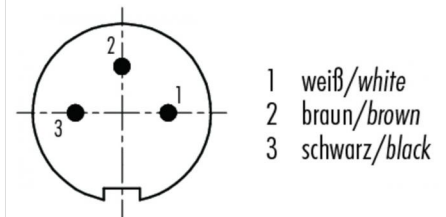

Technical data

General features

Connector Design	Cable Connector
Connector locking system	bolted
Termination	molded on cable
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Cable outlet	-
Upper temperature	70 °C
Lower temperature	-25 °C

Cable data

material housing	PUR
Insulation single lead	PVC
Single lead structure	32 x 0,1 mm
Cable sheath Ø	4.5
Conductor resistance	72Ω/Km
Temperature range cable movable °C from	-5
Temperature range cable movable °C to	70
Temperature range cable fixed °C from	-25
Temperature range cable fixed °C to	70
Bending radius cable fixed	Min. 22 mm
Bending radius cable movable	Min. 45 mm

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	II
Material group	III
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67
Mechanical operation	> 500 Mating cycles

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PBT (UL 94 V-0)
Material of housing	PUR