

Product **Contacts: 5, female cable connector overmoulded, cable length 2 m**


Area **Snap-in IP40 Series 709**

Article number **79 9006 12 05**


Illustration



Scale drawing

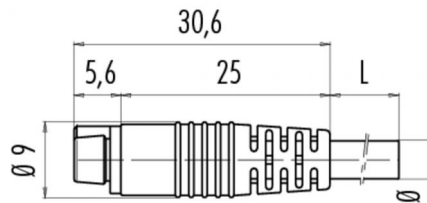

Contact Arrangement



- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black
- 5 grau/grey

Technical data

General features

Connector Design	Female cable connector
Connector locking system	snap
Termination	molded on cable
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Cable outlet	-
Upper temperature	70 °C
Lower temperature	-20 °C

Cable data

material housing	PVC
Insulation single lead	PVC
Single lead structure	32 x 0,10 mm
Cable sheath Ø	5
Conductor resistance	80Ω/Km (20°C)
Bending radius cable fixed	25 mm
Bending radius cable movable	50 mm
Cable diameter	5

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	1
Overvoltage category	II
Material group	III
Rated current (40°C)	3 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP40
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuSn (Bronze)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	PUR