

Product **Contacts: 4, female cable connector, Cable outlet: 10 - 12 mm**


Area **M18 Series 714**

Article number **99 0440 16 04**


Illustration



Scale drawing

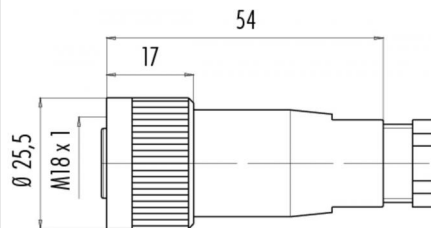

Contact Arrangement



	X	Y
1	3,18	-3,18
2	3,18	3,18
3	-3,18	3,18
4	-3,18	-3,18

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design	Female cable connector
Connector locking system	bolted
Termination	screw
Wire gauge (mm)	1,50 mm ²
Wire gauge (AWG)	16
Upper temperature	85 °C
Lower temperature	-25 °C

Electrical parameters


Rated voltage	250 V
Rated impulse voltage	4000 V
Pollution degree	3
Overvoltage category	III
Material group	III
Rated current (40°C)	16 A
Volume resistivity	≤ 8 mΩ
EMV compliance	not shielded
Degree of protection	IP67
Mechanical operation	> 50 Mating cycles

Material

Material of contact	CuZn (Messing)
Contact plating	CuSnZn (optalloy)
Material of contact body	PA (UL 94 V-0), PBT (UL 94 V-0)

Product	Contacts: 4, female cable connector, Cable outlet: 10 - 12 mm
Area	M18 Series 714
Article number	99 0440 16 04

Item description

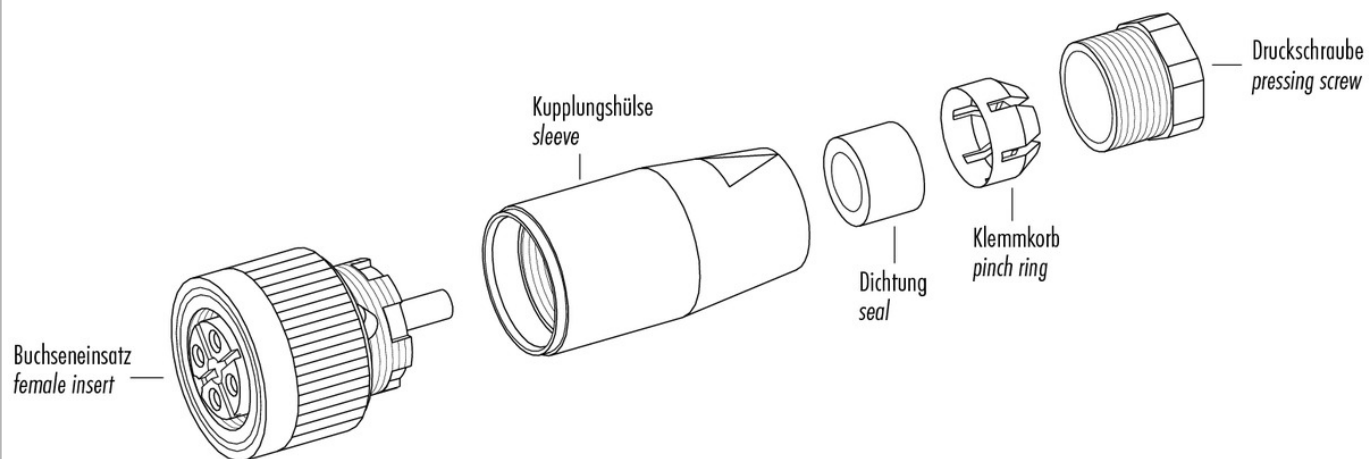

Installation instructions / Mounting cutout

