

Product **Contacts: 2, cable plug connector, cable outlet 3 -4 mm**


Area **Bayonet IP40 Series 710**

Article number **99 0971 100 02**


Illustration



Scale drawing

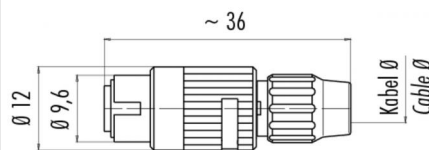

Contact Arrangement

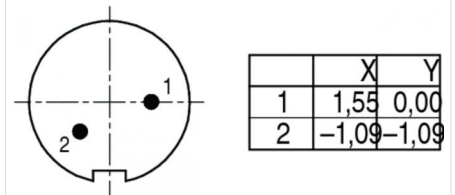

You can find the item description on the next page.

Technical data

General features

Connector Design	Cable Connector
Connector locking system	Bayonet
Termination	solder
Wire gauge (mm)	0,25 mm ²
Wire gauge (AWG)	24
Cable outlet	3 - 4 mm
Upper temperature	85 °C
Lower temperature	-40 °C

Electrical parameters

Rated voltage	125 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	II
Material group	III
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
EMV compliance	Shielding is not possible
Degree of protection	IP40
Mechanical operation	> 500 Mating cycles

Material

Material of contact	CuZn (Messing)
Contact plating	Au (gold)
Material of contact body	PA (UL 94 V-0)

Product **Contacts: 2, cable plug connector, cable outlet 3 -4 mm**

Area **Bayonet IP40 Series 710**
Article number **99 0971 100 02**

Item description

