

Product

Contacts: 4, female cable connector with cable clamp, CRIMP connection, shieldable, cable outlet 6 - 8 mm

Area

M16 IP40 Series 581


Article number

99 2010 702 04


Illustration



Scale drawing

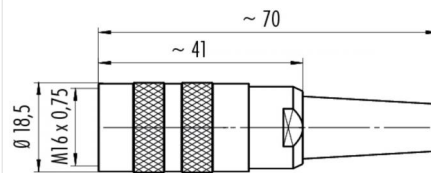


Contact Arrangement



	X	Y
1	-3,32	-1,08
2	-2,05	2,83
3	2,05	2,83
4	3,32	-1,08

Attenuation characteristics

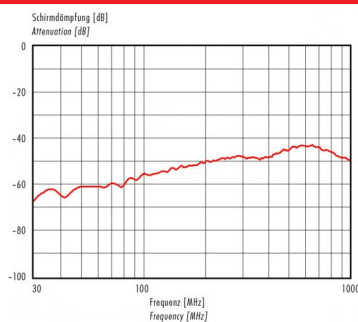

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design	Female cable connector
Connector locking system	bolted
Termination	crimp
Wire gauge (mm)	siehe Crimpkontakte unter Zubehör
Wire gauge (AWG)	-
Cable outlet	6 - 8 mm
Upper temperature	85 °C
Lower temperature	-40 °C

Electrical parameters


Rated voltage	250 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	6 A
Volume resistivity	≤ 5 mΩ
Degree of protection	IP40

Material

Material of contact	CuSn (Bronze)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)

Product	Contacts: 4, female cable connector with cable clamp, CRIMP connection, shieldable, cable outlet 6 - 8 mm
Area	M16 IP40 Series 581
Article number	99 2010 702 04

Item description

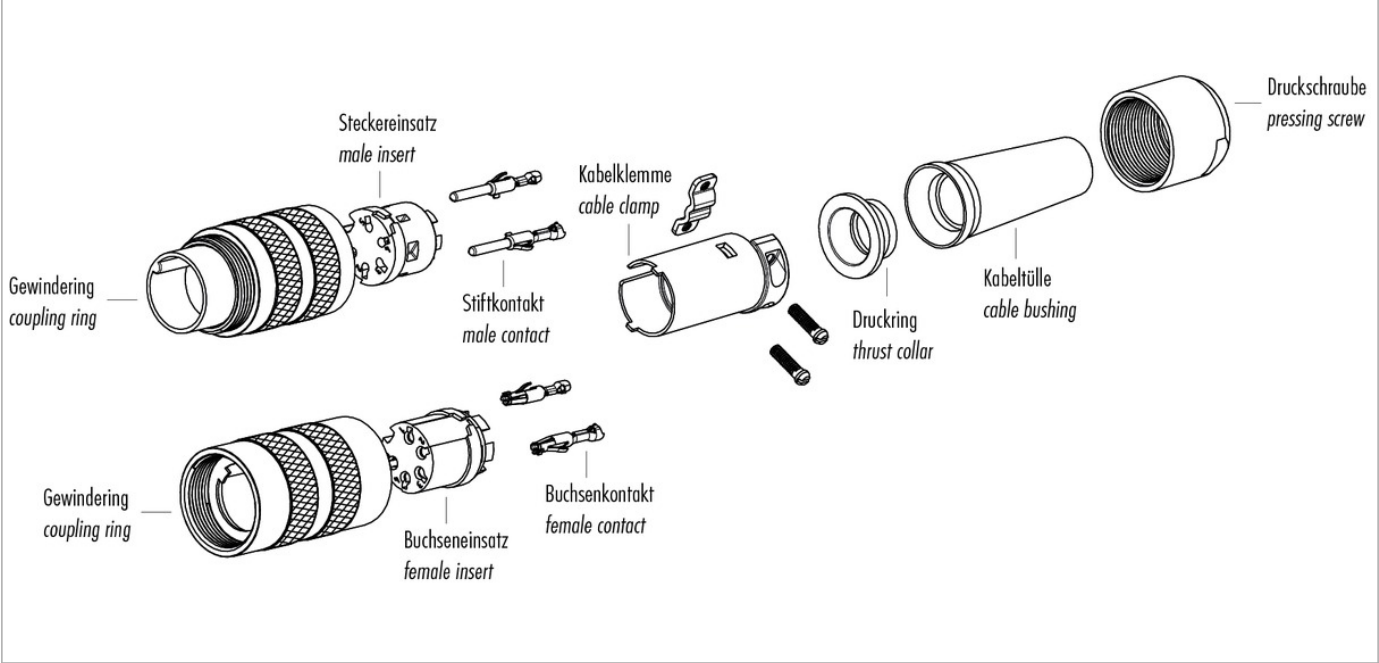

Installation instructions / Mounting cutout

