


Product	Contacts: 4, integrated socket for PCB mounting, straight, UL approval
Area	M12-D, M12-X Series 825/876 D-coding
Article number	99 3732 200 04

Illustration



Scale drawing

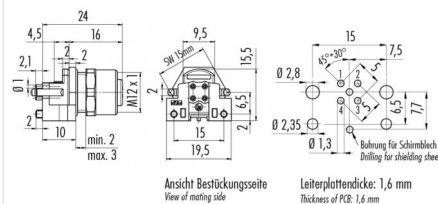

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	female panel mount connector
Connector locking system	bolted
Termination	dip-solder
Wire gauge (mm)	-
Wire gauge (AWG)	-
Upper temperature	85 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL
------------	----

Electrical parameters


Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67

Material

Material of contact	CuSn (Bronze)
Contact plating	Au (gold)
Material of contact body	PA

Product	Contacts: 4, integrated socket for PCB mounting, straight, UL approval
Area	M12-D, M12-X Series 825/876 D-coding
Article number	99 3732 200 04

Installation instructions / Mounting cutout

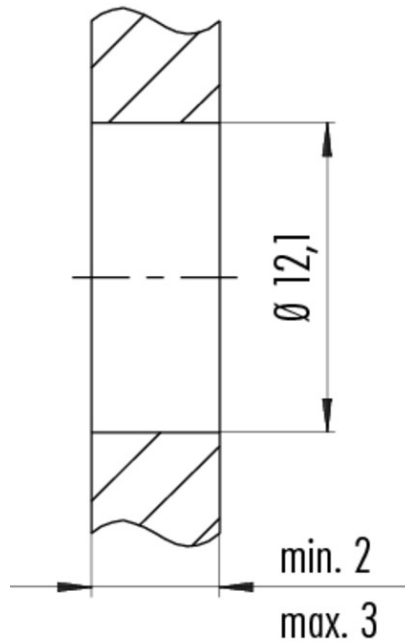

Anzugsdrehmoment/Tightening torque
M12 x 1 6,25 Nm

Installation instructions / Mounting cutout

