

Product **Contacts: 4, integrated socket for PCB mounting, angled, UL approval**


Area **M12-D, M12-X Series 825/876 D-coding**

Article number **99 3732 202 04**

Illustration



Scale drawing

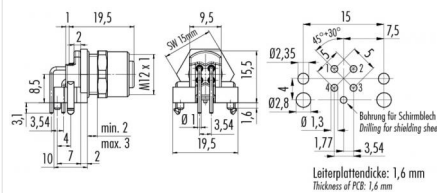

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	female panel mount connector
Connector locking system	bolted
Termination	dip-solder
Wire gauge (mm)	-
Wire gauge (AWG)	-
Upper temperature	85 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL
------------	----

Electrical parameters

Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP67

Material

Material of contact	CuSn (Bronze)
Contact plating	Au (gold)
Material of contact body	PA

Product	Contacts: 4, integrated socket for PCB mounting, angled, UL approval
Area	M12-D, M12-X Series 825/876 D-coding
Article number	99 3732 202 04

Installation instructions / Mounting cutout

