


Product **Contacts: 4, female panel mount connector SMT, with housing, shieldable**
Area **M12-B Series 715/766**
Article number **99 4432 401 04**


Illustration



Scale drawing

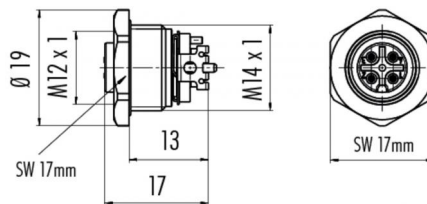

Contact Arrangement



	X	Y
1	-2,50	0,00
2	0,00	2,50
3	2,50	0,00
4	0,00	-2,50

- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black

Technical data

General features

Termination **SMT**
Upper temperature **-40 °C**
Lower temperature **85 °C**

Electrical parameters

Rated voltage **250 V**
Rated impulse voltage **2500 V**
Pollution degree **3**
Overvoltage category **II**
Material group **III**
EMV compliance **shieldable**
Degree of protection **IP67**
Mechanical operation **> 100 Mating cycles**