

Product **Contacts: 5, integrated socket for PCB mounting, straight, UL approval**


Area **M12-B Series 715/766**

Article number **99 4442 200 05**


Illustration



Scale drawing

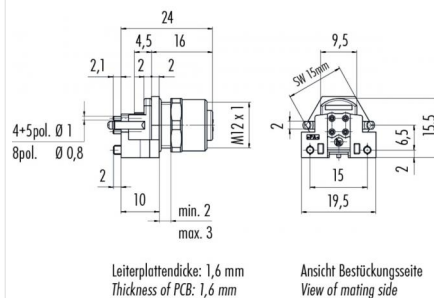

Contact Arrangement



	X	Y
1	-2,50	0,00
2	0,00	2,50
3	2,50	0,00
4	0,00	-2,50
5	0,00	0,00

- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black
- 5 grau/grey

You can find the assembly instruction on the next page.

Technical data

General features

Connector Design	integrated socket
Connector locking system	bolted
Termination	dip-solder
Wire gauge (mm)	-
Wire gauge (AWG)	-
Upper temperature	85 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL
------------	----

Electrical parameters

Rated voltage	60 V
Rated impulse voltage	1500 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	4 A
Volume resistivity	≤ 3 mΩ
EMV compliance	not shielded
Degree of protection	IP68
Mechanical operation	> 100 Mating cycles

Material

Material of contact	CuSn (Bronze)
Contact plating	Au (gold)
Material of contact body	PA

Product

Contacts: 5, integrated socket for PCB mounting, straight, UL approval


Area

M12-B Series 715/766

Article number

99 4442 200 05

Installation instructions / Mounting cutout

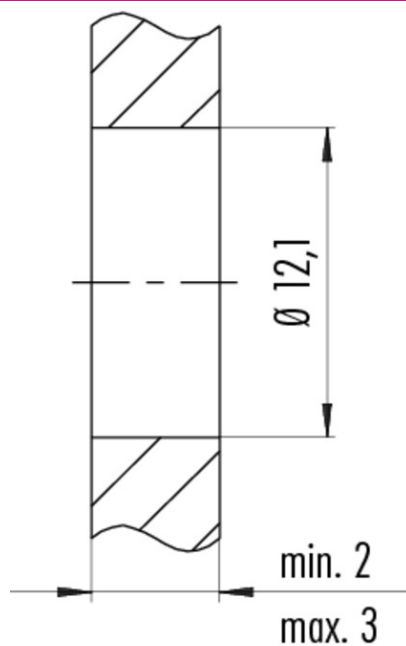

Anzugsdrehmoment/Tightening torque
M12 x 1 6,25 Nm