

Product **Contacts: 5, female panel mount connector SMT, with housing, shieldable**


Area **M12-B Series 715/766**

Article number **99 4442 401 05**


Illustration



Scale drawing

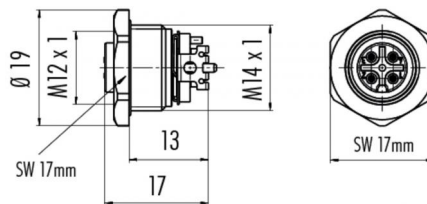

Contact Arrangement



	X	Y
1	-2,50	0,00
2	0,00	2,50
3	2,50	0,00
4	0,00	-2,50
5	0,00	0,00

- 1 braun/brown
- 2 weiß/white
- 3 blau/blue
- 4 schwarz/black
- 5 grau/grey

Technical data

General features

Termination SMT

Upper temperature -40 °C

Lower temperature 85 °C

Electrical parameters

Rated voltage 60 V

Rated impulse voltage 2500 V

Pollution degree 3

Overvoltage category II

Material group III

EMV compliance shieldable

Degree of protection IP67

Mechanical operation > 100 Mating cycles