


Product	Contacts: 4, cable plug connector with cable clamp, CRIMP connection, shieldable, cable outlet 4 - 6 mm
Area	M16 IP67 Series 423
Article number	99 5109 700 04


Illustration



Scale drawing

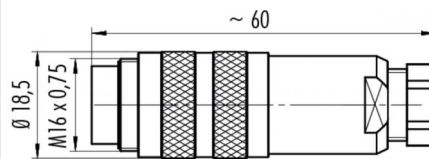

Contact Arrangement



	X	Y
1	3,32	-1,08
2	2,05	2,83
3	-2,05	2,83
4	-3,32	-1,08

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design	Cable Connector
Connector locking system	bolted
Termination	crimp
Wire gauge (mm)	0,14-1,0 mm ²
Wire gauge (AWG)	26-18
Cable outlet	4 - 6 mm
Upper temperature	95 °C
Lower temperature	-40 °C

Cable data

Approval 1	UL
------------	----

Electrical parameters


Rated voltage	250 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	I
Material group	III
Rated current (40°C)	6 A
Volume resistivity	≤ 5 mΩ
EMV compliance	shielded
Mechanical operation	> 500 Mating cycles

Material

Material of contact	CuSn (Bronze)
Contact plating	Ag (silver)
Material of contact body	PBT (UL 94 V-0)

Product	Contacts: 4, cable plug connector with cable clamp, CRIMP connection, shieldable, cable outlet 4 - 6 mm
Area	M16 IP67 Series 423
Article number	99 5109 700 04

Item description

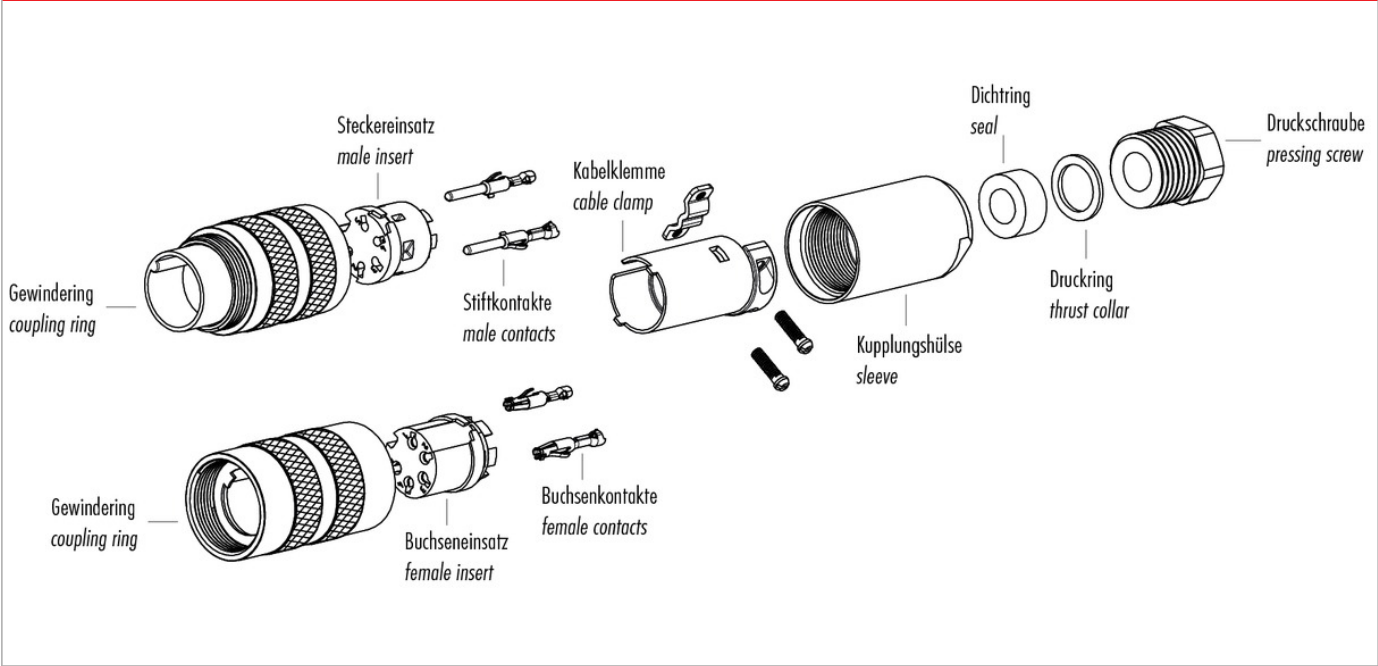

Installation instructions / Mounting cutout

