


Product **Contacts: 8, cable plug connector**
Area **Snap-in IP67 Series 620**
Article number **99 9225 00 08**


Illustration



Scale drawing

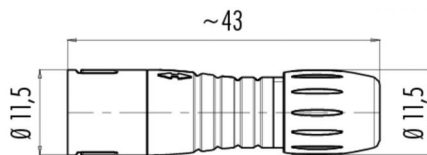

Contact Arrangement



	X	Y
1	0,96	-1,98
2	2,15	-0,49
3	1,72	1,37
4	0,00	2,20
5	-1,72	1,37
6	-2,15	-0,49
7	-0,96	-1,98
8	0,00	0,00

You can find the item description on the next page.

Technical data

General features

Connector Design Cable Connector
Connector locking system snap
Termination solder
Wire gauge (mm) 0,25 mm²
Wire gauge (AWG) 24
Cable outlet 3 - 5 mm
Upper temperature 85 °C
Lower temperature -25 °C

Electrical parameters

Rated voltage 63 V
Rated impulse voltage 800 V
Pollution degree 2
Overvoltage category II
Material group II
Rated current (40°C) 1 A
Volume resistivity ≤ 3 mΩ
EMV compliance Shielding is not possible
Degree of protection IP67
Mechanical operation > 500 Mating cycles

Material

Material of contact CuZn (Messing)
Contact plating Au (gold)
Material of contact body PA (UL 94 V-0)

Product **Contacts: 8, cable plug connector**

Area **Snap-in IP67 Series 620**
Article number **99 9225 00 08**

Item description

