

Product **Contacts: 8, male panel mount connector, green**


Area **Snap-in IP67 Series 620**

Article number **99 9227 070 08**


Illustration



Scale drawing



Contact Arrangement



	X	Y
1	0,96	-1,98
2	2,15	-0,49
3	1,72	1,37
4	0,00	2,20
5	-1,72	1,37
6	-2,15	-0,49
7	-0,96	-1,98
8	0,00	0,00

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design male panel mount connector

Connector locking system snap

Termination solder

Wire gauge (mm) 0,25 mm²

Wire gauge (AWG) 24

Cable outlet 3 - 5 mm

Upper temperature 85 °C

Lower temperature -25 °C

Electrical parameters

Rated voltage 63 V

Rated impulse voltage 800 V

Pollution degree 2

Overvoltage category II

Material group II

Rated current (40°C) 1 A

Volume resistivity ≤ 3 mΩ

EMV compliance not shielded

Degree of protection IP67

Mechanical operation > 500 Mating cycles

Material


Material of contact CuZn (Messing)

Contact plating Au (gold)

Material of contact body PA (UL 94 V-0)

Product	Contacts: 8, male panel mount connector, green
Area	Snap-in IP67 Series 620
Article number	99 9227 070 08

Item description

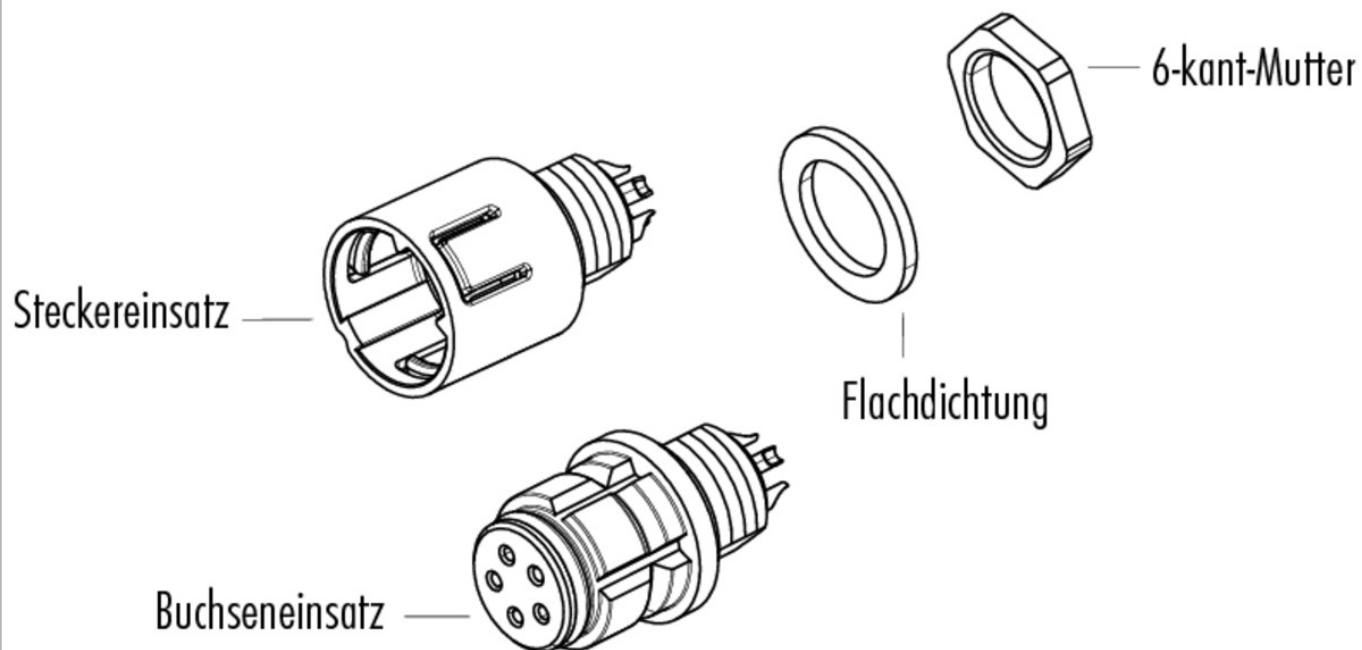

Installation instructions / Mounting cutout

