


Product **Contacts: 8, female panel mount connector, red**
Area **Snap-in IP67 Series 620**
Article number **99 9228 050 08**


Illustration



Scale drawing



Contact Arrangement



	X	Y
1	-0,96	-1,98
2	-2,15	-0,49
3	-1,72	1,37
4	0,00	2,20
5	1,72	1,37
6	2,15	-0,49
7	0,96	-1,98
8	0,00	0,00

You can find the item description and assembly instruction on the next page.

Technical data

General features

Connector Design female panel mount connector
Connector locking system snap
Termination solder
Wire gauge (mm) 0,25 mm²
Wire gauge (AWG) 24
Cable outlet 3 - 5 mm
Upper temperature 85 °C
Lower temperature -25 °C

Electrical parameters


Rated voltage 63 V
Rated impulse voltage 800 V
Pollution degree 2
Overvoltage category II
Material group II
Rated current (40°C) 1 A
Volume resistivity ≤ 3 mΩ
EMV compliance not shielded
Degree of protection IP67
Mechanical operation > 500 Mating cycles

Material

Material of contact CuSn (Bronze)
Contact plating Au (gold)
Material of contact body PA (UL 94 V-0)

Product	Contacts: 8, female panel mount connector, red
Area	Snap-in IP67 Series 620
Article number	99 9228 050 08

Item description

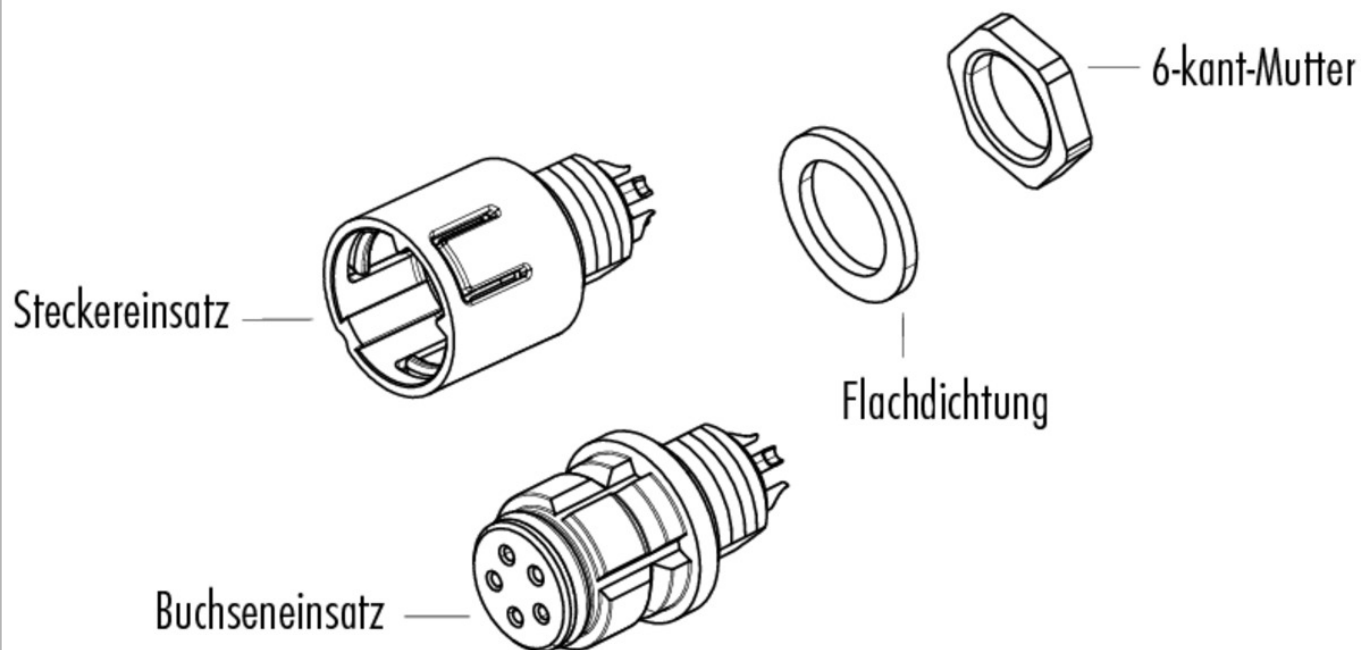

Installation instructions / Mounting cutout

