




APPLICATIONS / MARKETS




Handheld Devices



Instrumentation



Medical



Networking



Telecommunication

RoHS

SPECIFICATIONS

Electrical Rating: 0.4VA, 20V Max. (AC or DC)
Life Expectancy: 40,000 Cycles
Contact Resistance: 100mΩ Max.
Insulation Resistance: 500MΩ Min. at 500VDC
Dielectric Strength: 500VDC for 1 Minute
Operating Temperature: -30°C to 85°C

1 and 2 Pole Functions: On-On, Maintained
On-Off-On, Maintained
Off-On, Maintained

FEATURES & BENEFITS

- Ultraminiature in size
- Variety of functions
- PCB Mounting - vertical or right angle mounting options
- Sealed to IP67

PART NUMBER CONFIGURATOR

Series	Model No.	Actuator	Bushing	Terminal	Contact Material	Seal
200U	SP1 SP3 SP9 DP1 DP3 DP9	T1	A1	M2 M6 M7	R	E
	SP1 - On-None-On SP3 - On-Off-On SP9 - Off-None-On DP1 - On-None-On DP3 - On-Off-On DP9 - Off-None-On	T1 - 3.80 High	A1 - 1.60 High	M2 - PC Through Hole M6 - Right Angle PC Through Hole M7 - Vertical Right Angle PC Through Hole	R - Gold	E - Epoxy

Specifications subject to change without notice



E-SWITCH®




www.e-switch.com


800.867.2717

1

ACTUATOR OPTIONS


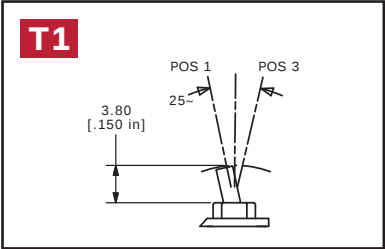


BUSHING OPTIONS





TERMINATION OPTIONS

M2 - SPDT

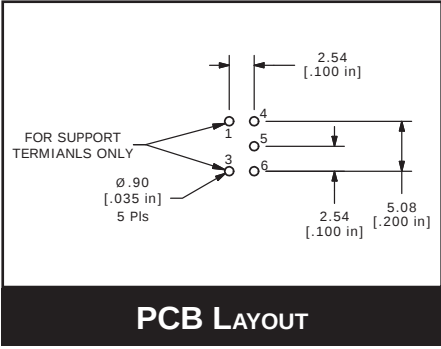
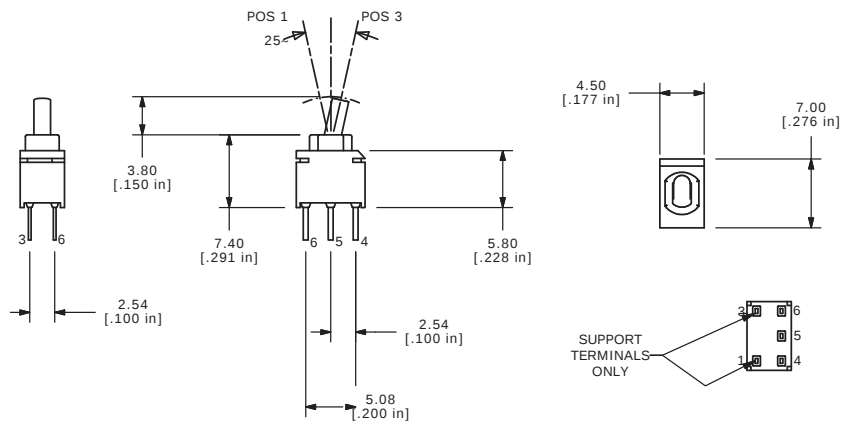


M2 - DPDT

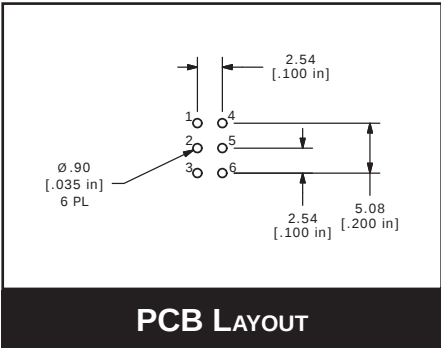
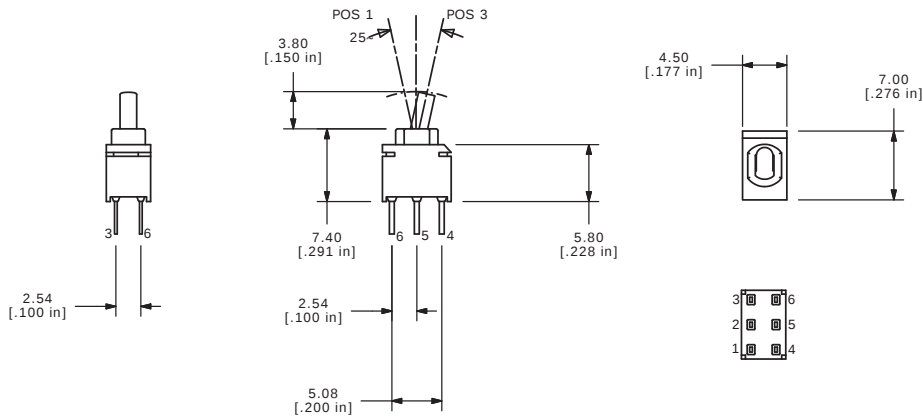


ANTI-VANDAL SWITCHES
DETECTOR SWITCHES
DIP SWITCHES
KEYLOCK SWITCHES
NAVIGATION SWITCHES
PUSHBUTTON SWITCHES
ROCKER SWITCHES
ROTARY SWITCHES
SLIDE SWITCHES
SNAP ACTION SWITCHES
TACTILE SWITCHES
TOGGLE SWITCHES
CAP OPTIONS



M6 - SPDT

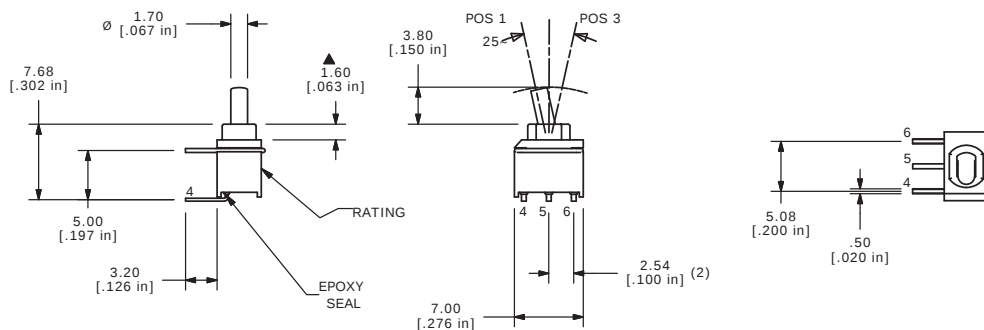

M6 - DPDT

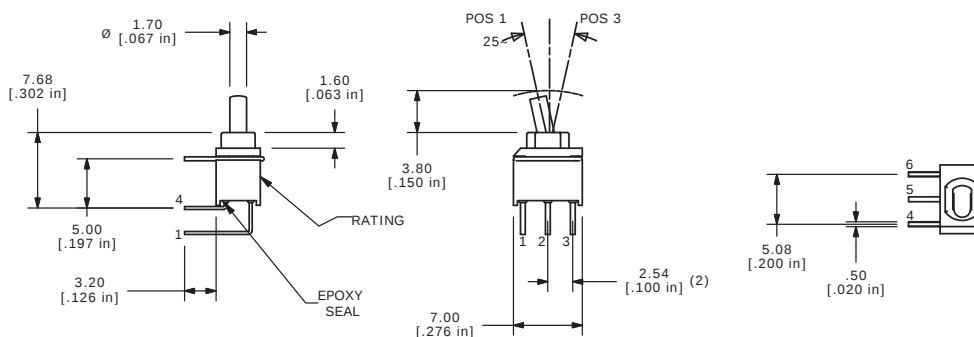

M7 - SPDT

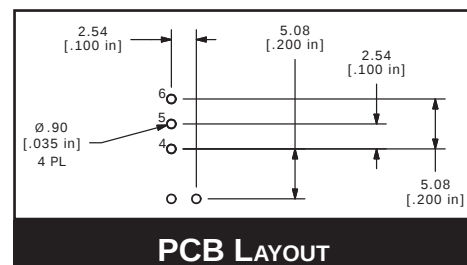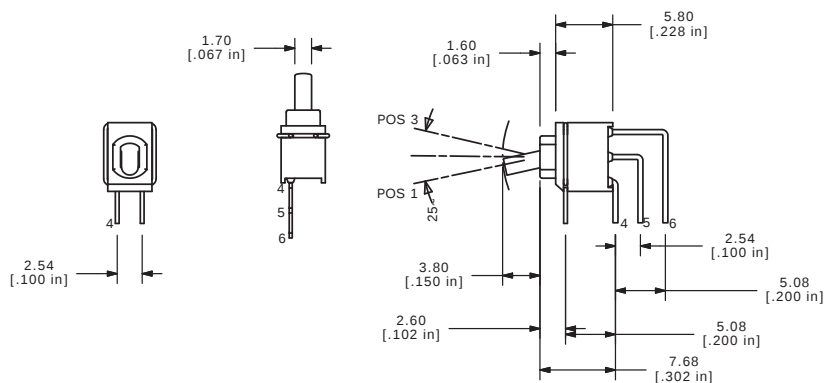

M7 - DPDT

