


Product description **Contacts: 9, female panel mount connector, front mounting, right-turning**

Area **M23 Power Series 623**
Order number **99 4604 00 09**


Illustration



Scale drawing

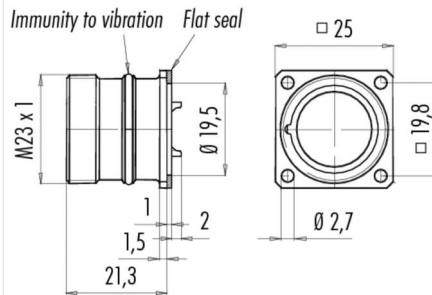

Contact arrangement

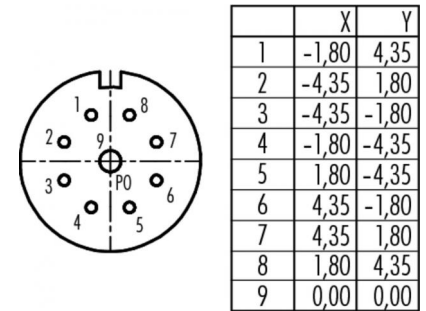

Technical data

General values

| | |
|--------------------------|------------------------------|
| Connector design | female panel mount connector |
| Connector locking system | bolted |
| Termination | solder |
| Arrangement of contacts | clockwise |
| Wire gauge (mm) | 8x1,5/ 1x2,5 mm ² |
| Wire gauge (AWG) | 8x16/1x14 |
| Upper limit temperature | 125 °C |
| Lower limit temperature | -20 °C |

Electrical values

| | |
|---------------------------|---------------------------|
| Rated current (40 °C) | 8 x 8 A / 1 x 20 A |
| Rated voltage | 300 V |
| Rated impulse voltage | 2500 V |
| Pollution degree | 3 |
| Overvoltage category | II |
| Insulating material group | III |
| Volume resistivity | ≤ 3 mΩ |
| Insulation resistance | ≥ 10 ¹⁰ Ω |
| EMC compliance | Shielding is not possible |
| Degree of protection | IP67 |
| Mechanical operation | > 50 Mating cycles |

Material

| | |
|-----------------------|-----------------------------|
| Contact material | CuSn (bronze) |
| Contact plating | Au (gold) |
| Contact body material | PBT/PA66 |
| Housing material | Zinc die-cast nickel-plated |

| | |
|---------------------|---|
| Product description | Contacts: 9, female panel mount connector, front mounting, right-turning |
| Area | M23 Power Series 623 |
| Order number | 99 4604 00 09 |

Security notices

The connector must not be connected or separated under load. Non-observance and incorrect use can result in personal injury.

The connectors are designed for use in plant, control system and electrical equipment. The end user is responsible for checking whether the connectors are suitable for use in other applications.

Connectors with degree of protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the connectors must be separately protected against corrosion. For further information about IP degrees of protection refer to 'Technical support' in the Download Centre.