4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket



See below: Approvals and Compliances

Description

- pre-assembled cable
- Low Voltage DC Plug and Socket
- DC Plug: 2-pole , angled

Technical Data

Diameter	5.5 mm / 2.1 mm	
Number of Poles	2-pole	
Ratings DC	0.5 A / 12 VDC	
Dielectric Strength	500 VDC	
Insulation Resistance	> 100 MΩ @ 500 VDC	

Allowable Operation Tempe-	-20 °C to 70 °C
rature	
Terminal	Cable
Cord Lenght	1.8 m
Cable Cross Section	2 x 0.3 mm ²
Style	angled
Lifetime	5000 Insertions

Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in Details about Approvals


SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

Compliances

The product complies with following Guide Lines

	0		
Identification	Details	Initiator	Description
RoHS	RoHS	SCHURTER AG	Directive RoHS 2011/65/EU, Amendment (EU) 2015/836
©	China RoHS	SCHURTER AG	The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.
REACH	REACH	SCHURTER AG	On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.

Dimensions [mm]

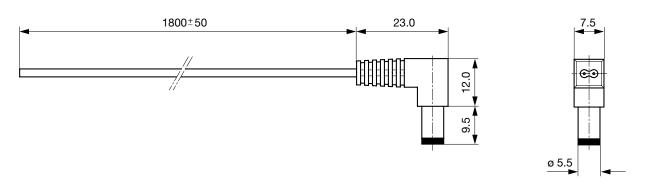

4840.5201

All Variants

DC Plug/Socket 5.5 2-pole Cable	4840.5201	

Most Popular.

Availability for all products can be searched real-time:https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER

Packaging unit 200 Pcs

Mating Outlets/Connectors

Category / Description



DC Plug/Socket Overview complete

4840, solder terminal, Socket, 6.3 mm, 2-pole, DC Plug/Socket	4840.2200
4840, PCB terminals, Socket, 6.0 mm, 2-pole, DC Plug/Socket	4840.2201
4840, Cable, Plug, 5.5 mm, 2-pole, DC Plug/Socket	4840.5202
DC Plug/Socket further types to 4840.5201	