


Product description M16 IP67 female panel mount connector, Contacts: 8 DIN, unshielded, single wires, IP68, UL, AISG compliant

Area M16 IP67 series 723
Order number 09 0174 702 08


Illustration



Scale drawing



Contact arrangement (Plug-in side)

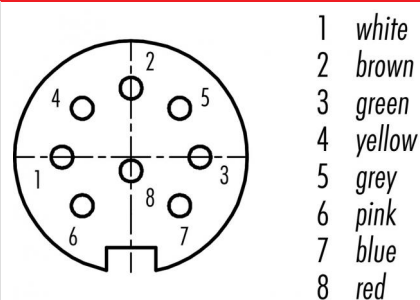

You can find the assembly instructions on the next page.

Technical data

General values

Connector design	female panel mount connector
Connector locking system	screw
Termination	single wires
Wire gauge (AWG)	AWG 22
Upper limit temperature	85 °C
Lower limit temperature	-30 °C
Customs tariff number	85369010

Electrical values

Rated current (40 °C)	5 A
Rated voltage	100 V
Rated impulse voltage	1200 V
Pollution degree	I
Overvoltage category	II
Insulating material group	≥ 10 ¹⁰ Ω
Insulation resistance	unshielded
EMC compliance	IP68
Degree of protection	IP67
Mechanical operation	> 500 Mating cycles

Material


Contact material	CuSn (bronze)
Contact plating	Ag (silver)
Contact body material	PBT (UL94 V-0)
Housing material	Zinc die-cast nickel-plated
REACH SVHC	CAS 7439-92-1 (Lead)

authorization/approvals

Approval 1	UL
Approval 2	AISG compliant

Product description	M16 IP67 female panel mount connector, Contacts: 8 DIN, unshielded, single wires, IP68, UL, AISG compliant
Area	M16 IP67 series 723
Order number	09 0174 702 08

Assembly instructions / Panel cut-out

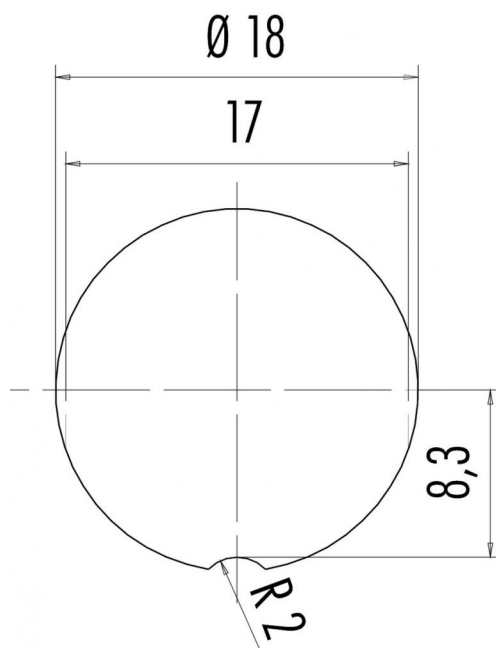

Product description	M16 IP67 female panel mount connector, Contacts: 8 DIN, unshielded, single wires, IP68, UL, AISG compliant
Area	M16 IP67 series 723
Order number	09 0174 702 08

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.