

SH6 SERIES SUBMINIATURE PUSHWHEEL SWITCHES









FEATURES

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

- The smallest panel mounting pushwheel switches available
- Snap action detent with audible click
- Black housing & drum with white printing
- Gangable front and rear mounting models
- Gold wiping action contacts
- PC board options include solderable lands, fingers or pc solder pins

SH6, SH6G & SH6S SPECIFICATIONS

Panel mounting hole:

Height .590"(15mm) Width .236"(6mm)

Installed depth with pc board:

Short .925"(23.5mm) Long 1.213"(30.8mm)

Insertion from front yes
Insertion from rear yes

CODES

Code positions marking

131 BCD100-9see truth tables137 BCD comp100-9see truth tables400 change-over10+,-,+,-,etc..see truth tables

ELECTRICAL DATA

Operating voltage: 40 V max.

Contact load, static: 0.5 A max.

Contact load, dynamic: 100 mA max.

Contact resistance (type AK): less than 100 mOhm

TECHNICAL DATA

Operating temperature range: -20°C to 80°C Electric life, min. switching cycles 100,000 Actuation force, approx (oz.): 14 Weight, approx. (grams): 1.5

Character height: .122"(3.1mm)

Audible click yes
Vibration DIN EN 60068-2-6 yes
Shock DIN EN 60068-2-27 yes

MATERIALS

Body: PPO

PC board: FR 4 DIN 40802

IEC 249-2, Contact surface gold over nickel on copper

Sliding contact: Gold over nickel

on copper alloy

STANDARD COLORS

Housing, Drum, Printing

 $2 = black \ 3 = white \ 2,2,3$

Other special features are available upon

request including:

Factory or customer set stops

Red digits
Decimal point


Special codes or printing

www.apem.com




SH6 SERIES SUBMINIATURE PUSHWHEEL SWITCHES

TRUTH TABLES




SH6 & SH6G CODE 137 BCD COMP.					
	С	<u>T</u>	2	4	8
0	•	•	•	•	•
1	•		•	•	•
2 3	•	•		•	•
3	•			•	•
4 5 6	•	•	•		•
5	•		•		•
	•	•			lacktriangle
7	•				•
8	•	•	•	•	
9	•		•	•	





MECHANICAL OUTLINES WITH PANEL CUT-OUTS


n = number of switches

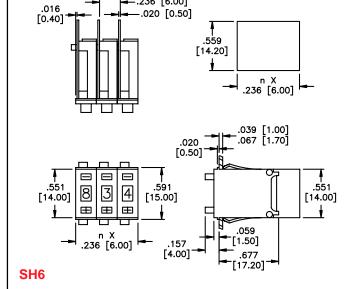


-.236 [6.00]

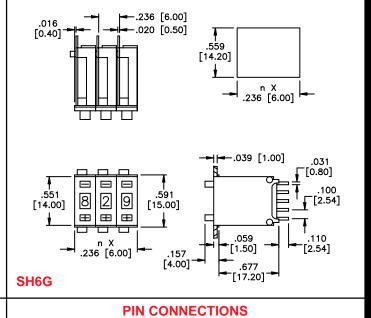

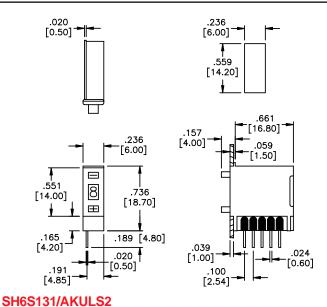






• The switching mode is shorting - i.e. - even during actuation, at least one output is connected to input C.



SH6 SERIES SUBMINIATURE PUSHWHEEL SWITCHES

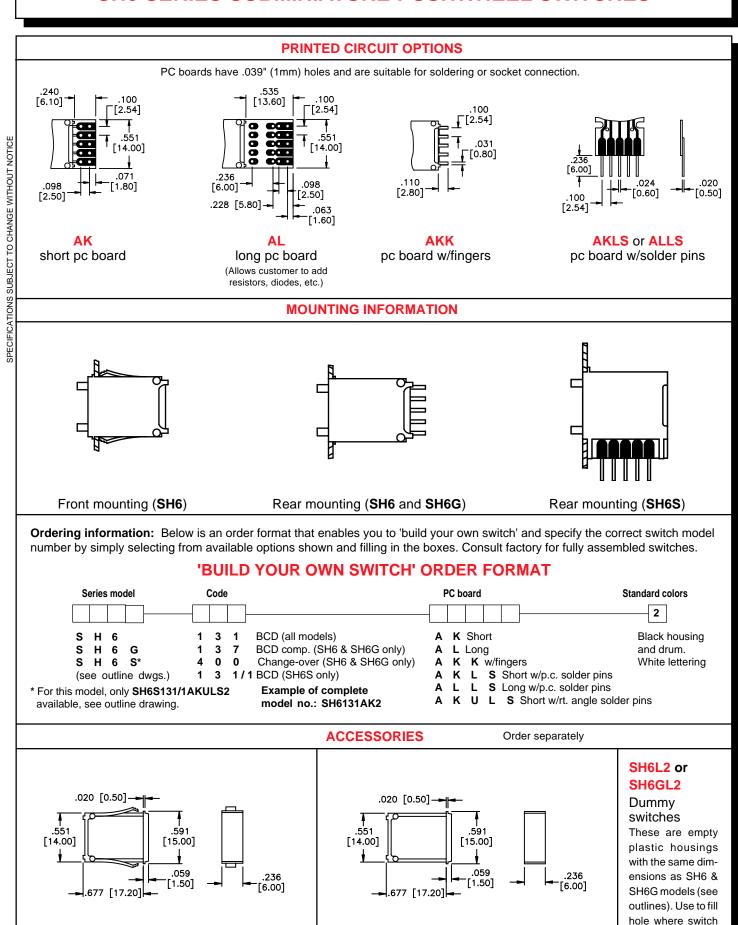

SH6GL2 Dummy housing

SH6L2 Dummy housing

is not needed.