

Product data sheet

Subminiature connectors




Product description	M9 IP67 female angled connector, Contacts: 8, unshielded, moulded on cable, IP67, PUR black, 8 x 0.14 mm ²
Area	M9 IP67 series 702
Order number	79 1462 275 08


Illustration



Scale drawing

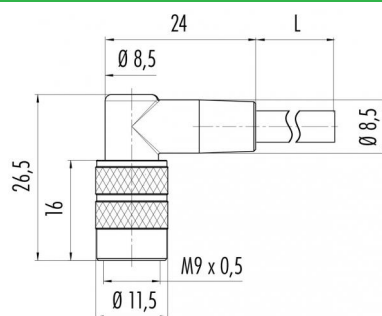

Contact arrangement (Plug-in side)

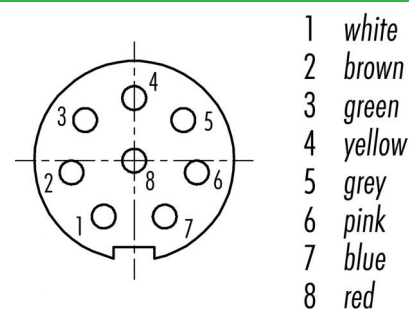

Technical data

General values

Connector design	female angled connector
Connector locking system	screw
Termination	moulded on cable
Wire gauge (mm)	0.14 mm ²
Wire gauge (AWG)	AWG 26
Upper limit temperature	70 °C
Lower limit temperature	-25 °C
Customs tariff number	85444290

Cable data

Cable length	5 m
Sheath material	PUR
Single-lead insulation	PVC/ PE
Halogen free	No
Single-lead structure	18x0,1 mm
Cable diameter	5.0 mm
Cable color	black
Conductor resistance	117Ω/Km
Temperature range, moving cable, °C from	-25°C
Temperature range, moving cable, °C to	+70°C
Temperature range, fixed cable, °C from	-25°C
Temperature range, fixed cable, °C to	+70°C

Electrical values

Rated current (40 °C)	1 A
Rated voltage	125 V
Rated impulse voltage	1500 V
Pollution degree	1
Overvoltage category	II
Insulating material group	III
Insulation resistance	≥ 10 ¹⁰ Ω
EMC compliance	unshielded
Degree of protection	IP67
Mechanical operation	> 500 Mating cycles

Material

Contact material	CuSn (bronze)
Contact plating	Au (gold)
Contact body material	PBT (UL94 V-0)
Housing material	PUR
Locking material	CuZn (Brass nickel plated)
REACH SVHC	CAS 7439-92-1 (Lead)

Product description	M9 IP67 female angled connector, Contacts: 8, unshielded, moulded on cable, IP67, PUR black, 8 x 0.14 mm ²
Area	M9 IP67 series 702
Order number	79 1462 275 08

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre. To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).