


Product description	M12-A connecting cord, Contacts: 2, unshielded, moulded on cable, IP67, PUR black, 2 x 0.75 mm ²
Area	M12-A series 775
Order number	79 6425 20 02

Illustration



Scale drawing

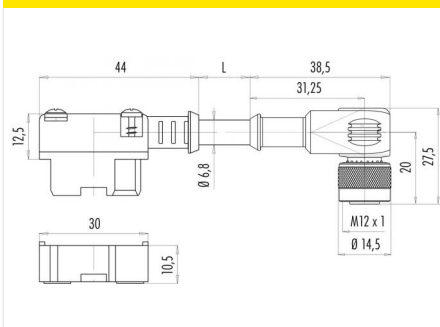

You can find the component part drawing on the next page.

Technical data

General values

Connector design	connecting cord
Connector locking system	ribbon cable terminal
Termination	moulded on cable
Wire gauge (mm)	AS-Interface 1.50 mm ² / 0.75 mm ²
Wire gauge (AWG)	AS-Interface AWG 16/18
Upper limit temperature	70 °C
Lower limit temperature	-25 °C
Customs tariff number	85444290

Cable data

Cable length	2 m
Sheath material	PUR
Single-lead insulation	PVC
Halogen free	No
Single-lead structure	24x0,195 mm
Cable diameter	5.9 mm
Cable color	black
Conductor resistance	26
Temperature range, moving cable, °C from	-55 °C
Temperature range, moving cable, °C to	+70 °C
Temperature range, fixed cable, °C from	-25 °C
Temperature range, fixed cable, °C to	+70 °C
Bending radius, fixed cable	≥ 3 x Ø
Bending radius, moving cable	≥ 10 x Ø

Electrical values


Rated current (40 °C)	2 A (per contact)
Rated voltage	30 V
Rated impulse voltage	500 V
Pollution degree	3
Insulation resistance	≥ 10 ¹⁰ Ω
EMC compliance	unshielded
Degree of protection	IP67

Material

Contact material	CuZn (brass) / CuSn (bronze)
Contact plating	Sn (tin)/Au (gold)
Contact body material	PA
Housing material	PA/PUR
REACH SVHC	CAS 7439-92-1 (Lead)

Product description	M12-A connecting cord, Contacts: 2, unshielded, moulded on cable, IP67, PUR black, 2 x 0.75 mm ²
Area	M12-A series 775
Order number	79 6425 20 02

Component part drawing

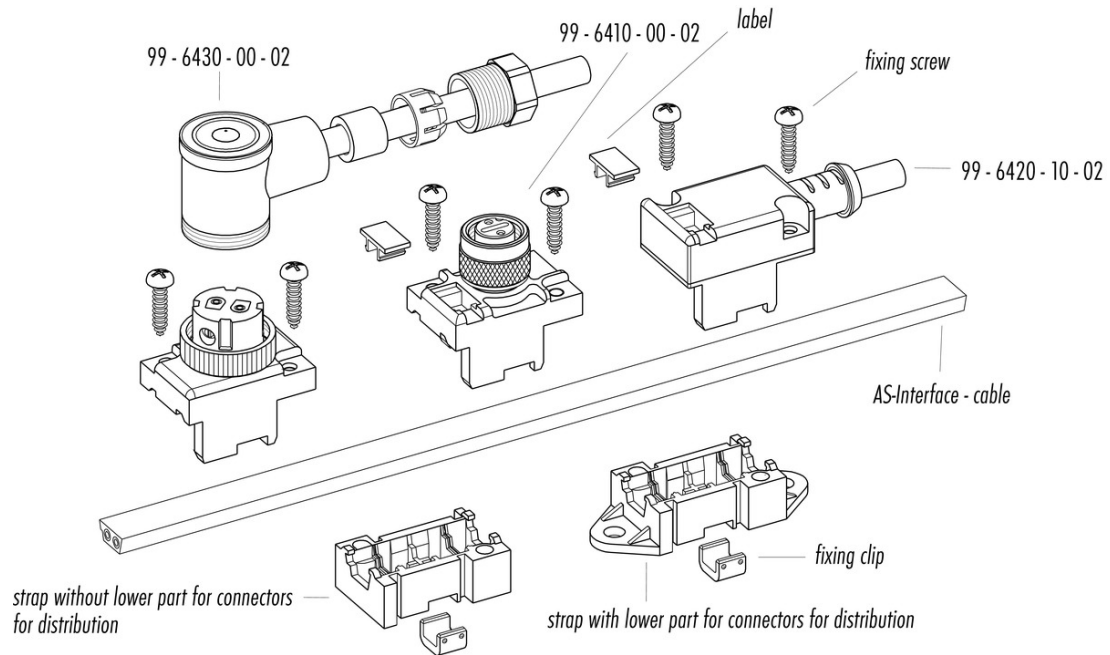

Product description	M12-A connecting cord, Contacts: 2, unshielded, moulded on cable, IP67, PUR black, 2 x 0.75 mm ²
Area	M12-A series 775
Order number	79 6425 20 02

Security notices

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.