


|                     |                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------|
| Product description | M12-A female panel mount connector, Contacts: 4, unshielded, single wires, IP67, UL, M16x1.5 plastic |
| Area                | M12-A series 763                                                                                     |
| Order number        | 76 4332 0011 00004-0200                                                                              |


### Illustration



### Scale drawing

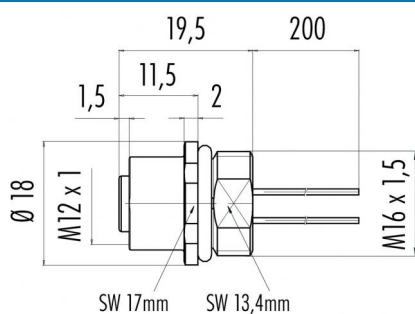

### Contact arrangement (Plug-in side)

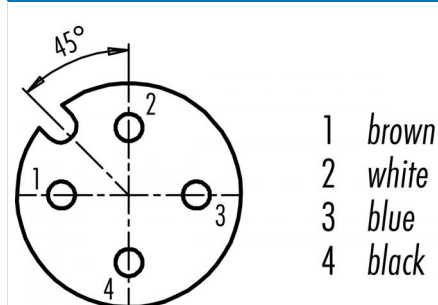

You can find the assembly instructions on the next page.

## Technical data

### General values

|                          |                              |
|--------------------------|------------------------------|
| Connector design         | female panel mount connector |
| Connector locking system | screw                        |
| Termination              | single wires                 |
| Wire gauge (mm)          | 0.25 mm <sup>2</sup>         |
| Wire gauge (AWG)         | AWG 24                       |
| Upper limit temperature  | 85 °C                        |
| Lower limit temperature  | -40 °C                       |
| Customs tariff number    | 85369010                     |

### Electrical values

|                           |                     |
|---------------------------|---------------------|
| Rated current (40 °C)     | 4 A (3 A UL)        |
| Rated voltage             | 250 V               |
| Rated impulse voltage     | 2500 V              |
| Pollution degree          | 3                   |
| Overvoltage category      | II                  |
| Insulating material group | III                 |
| Insulation resistance     | > 10 <sup>8</sup> Ω |
| EMC compliance            | unshielded          |
| Degree of protection      | IP67                |
| Mechanical operation      | > 100 Mating cycles |

### Material

|                       |                      |
|-----------------------|----------------------|
| Contact material      | CuSn (bronze)        |
| Contact plating       | Au (gold)            |
| Contact body material | PA                   |
| Housing material      | PA                   |
| Locking material      | plastic              |
| REACH SVHC            | CAS 7439-92-1 (Lead) |

### authorization/approvals

|            |    |
|------------|----|
| Approval 1 | UL |
|------------|----|


Product description M12-A female panel mount connector, Contacts: 4, unshielded, single wires, IP67, UL, M16x1.5 plastic

Area M12-A series 763


Order number 76 4332 0011 00004-0200

## Assembly instructions / Panel cut-out

With flats as anti-rotation device

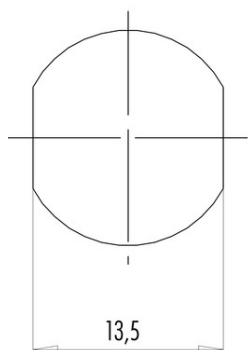

With bore hole

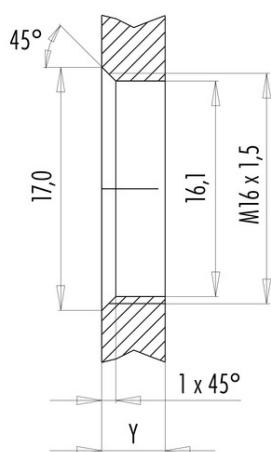

Installation direction: o-ring sits on chamfer.

### Tightening moment

Metall housing/Plastic housing 1,25 Nm

| Thickness of wall Y (mm)           |                                    |          |
|------------------------------------|------------------------------------|----------|
| Version                            | min (mm)                           | max (mm) |
| Fastened from rear                 | 2                                  | 3,5      |
| Front fastened                     | 2                                  | 4,5      |
| positioning possible <sup>1)</sup> | 2                                  | 3,5      |
| Screw clamp                        | 2                                  | 3,5      |
| Thread M12 x 1                     | 2                                  | 3,0      |
| Thread M14 x 1 <sup>2)</sup>       | <sup>3)</sup> 1,5/ <sup>4)</sup> 2 | 6,5      |

### Notes

- <sup>1)</sup> Do not attach a chamfer
- <sup>2)</sup> Wall thickness:  
use locknut 01-5385 up to 1,5 mm,  
>1,5 mm cut thread
- <sup>3)</sup> Nut
- <sup>4)</sup> Thread in wall of housing

|                     |                                                                                                      |
|---------------------|------------------------------------------------------------------------------------------------------|
| Product description | M12-A female panel mount connector, Contacts: 4, unshielded, single wires, IP67, UL, M16x1.5 plastic |
| Area                | M12-A series 763                                                                                     |
| Order number        | 76 4332 0011 00004-0200                                                                              |

## Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.