


Product description	M12-A female panel mount connector, Contacts: 4, shieldable, dip-solder, IP68, UL, PG9, front mounting
Area	M12-A series 763
Order number	86 0532 1120 00004


Illustration




Conductor layout

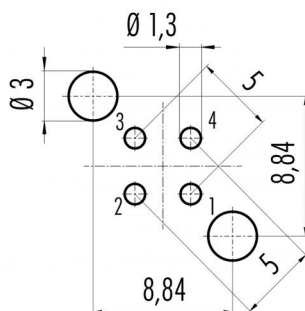

Scale drawing

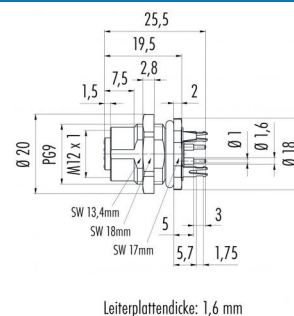

Contact arrangement (Plug-in side)



- 1 brown
- 2 white
- 3 blue
- 4 black

Shielded versions: shield = housing

You can find the assembly instructions on the next page.

Technical data

General values

Notice

Please note that, due to the change from the old to the new order number, there may be deviations in the technical specifications. For questions about product details, please use the 'Contact Customer Service' form on the right.

Connector design

Connector locking system
Termination
Upper limit temperature
Lower limit temperature
Customs tariff number

screw
dip-solder
85 °C
-40 °C
85369010

Electrical values

Rated current (40 °C)	4 A (3 A UL)
Rated voltage	250 V
Rated impulse voltage	2500 V
Pollution degree	3
Overvoltage category	II
Insulating material group	III
Insulation resistance	$> 10^8 \Omega$
EMC compliance	shieldable
Degree of protection	IP68
Mechanical operation	> 100 Mating cycles

authorization/approvals

Approval 1 UL

Product description	M12-A female panel mount connector, Contacts: 4, shieldable, dip-solder, IP68, UL, PG9, front mounting
Area	M12-A series 763
Order number	86 0532 1120 00004

Technical data

Material


Contact material	CuSn (bronze)
Contact plating	Au (gold)
Contact body material	PA
Housing material	Zinc die-cast nickel-plated
REACH SVHC	CAS 80-05-7 (4,4'-isopropylidendiphenol) CAS 7439-92-1 (Lead) CAS 61788-32-7 (Terphenyl, hydrogenated)

Product description M12-A female panel mount connector, Contacts: 4, shieldable, dip-solder, IP68, UL, PG9, front mounting


Area M12-A series 763
Order number 86 0532 1120 00004

Assembly instructions / Panel cut-out

With flats as anti-rotation device

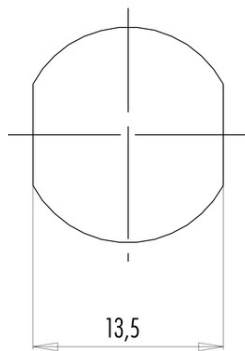

With bore hole

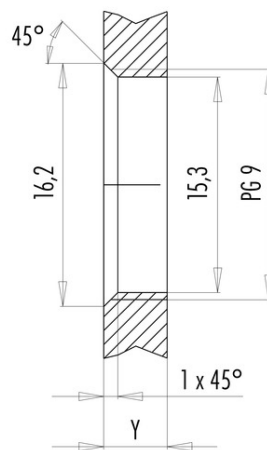

Installation direction: o-ring sits on chamfer.

Tightening moment

Metall housing/Plastic housing 1,25 Nm

Thickness of wall Y (mm)		
Version	min (mm)	max (mm)
Fastened from rear	2	3,5
Front fastened	2	4,5
positioning possible ¹⁾	2	3,5
Screw clamp	2	3,5
Thread M12 x 1	2	3,0
Thread M14 x 1 ²⁾	³⁾ 1,5/ ⁴⁾ 2	6,5

Notes

- ¹⁾ Do not attach a chamfer
- ²⁾ Wall thickness:
use locknut 01-5385 up to 1,5 mm,
>1,5 mm cut thread
- ³⁾ Nut
- ⁴⁾ Thread in wall of housing

Product description	M12-A female panel mount connector, Contacts: 4, shieldable, dip-solder, IP68, UL, PG9, front mounting
Area	M12-A series 763
Order number	86 0532 1120 00004

Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.