


Product description	RD24 female cable connector, Contacts: 6+PE, 6.0 - 8.0 mm, unshielded, screw clamp, IP67, PG9
Area	RD24 series 692
Order number	99 0218 00 07

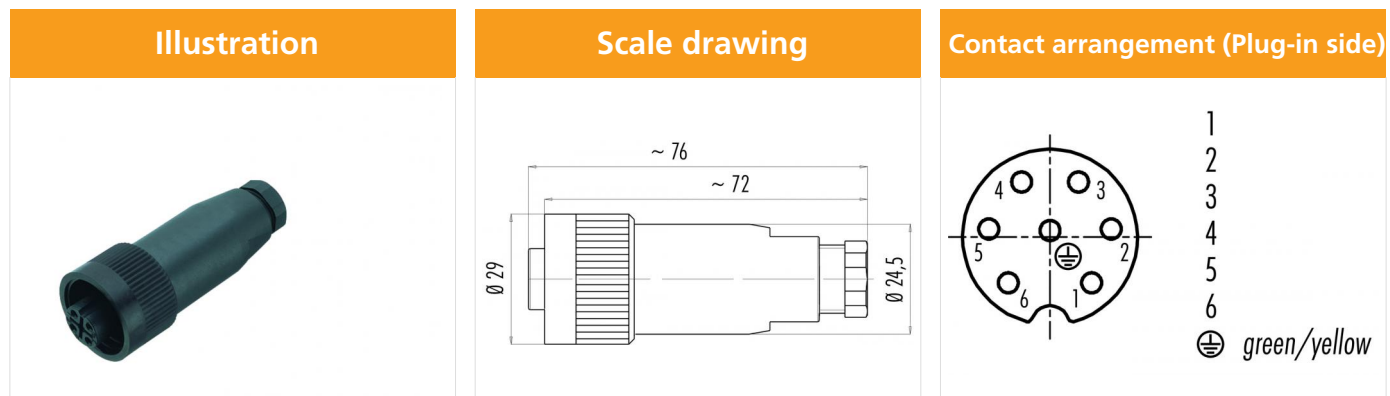

You can find the component part drawing and assembly instructions on the next page.

## Technical data

### General features

Order number	99 0218 00 07
Connector design	female cable connector
Version	connector female
Connector locking system	straight
Termination	screw
Degree of protection	screw clamp
	IP67
	IP65 with cable
	diameter 6-7 mm
Cross-sectional area	max. 1.50 mm <sup>2</sup> / max.
	AWG 16
Cable outlet	6.0 - 8.0 mm
Temperature range from/to	-40 °C / 100 °C
Mechanical operation	> 500 Mating cycles
Weight (g)	38.329
Customs tariff number	85369010

### Electrical parameters

Rated voltage	250 V
Rated impulse voltage	4000 V
Rated current (40 °C)	10 A
Insulation resistance	≥ 10 <sup>10</sup> Ω
Pollution degree	3
Overvoltage category	III
Insulating material group	III
EMC compliance	unshielded

### Material

Contact body material	PBT (UL94 V-0)
Contact material	CuSn (bronze)
Contact plating	Ag (silver)
REACH SVHC	CAS 7439-92-1 (Lead)

### Classifications


eCl@ss 11.1	27-44-01-02
ETIM 7.0	EC002635

### Declarations of conformity


Low Voltage Directive	2014/35/EU (EN 60204-1:2018;EN 60529:1991)
-----------------------	--

Product description	RD24 female cable connector, Contacts: 6+PE, 6.0 - 8.0 mm, unshielded, screw clamp, IP67, PG9
Area	RD24 series 692
Order number	99 0218 00 07

## Component part drawing

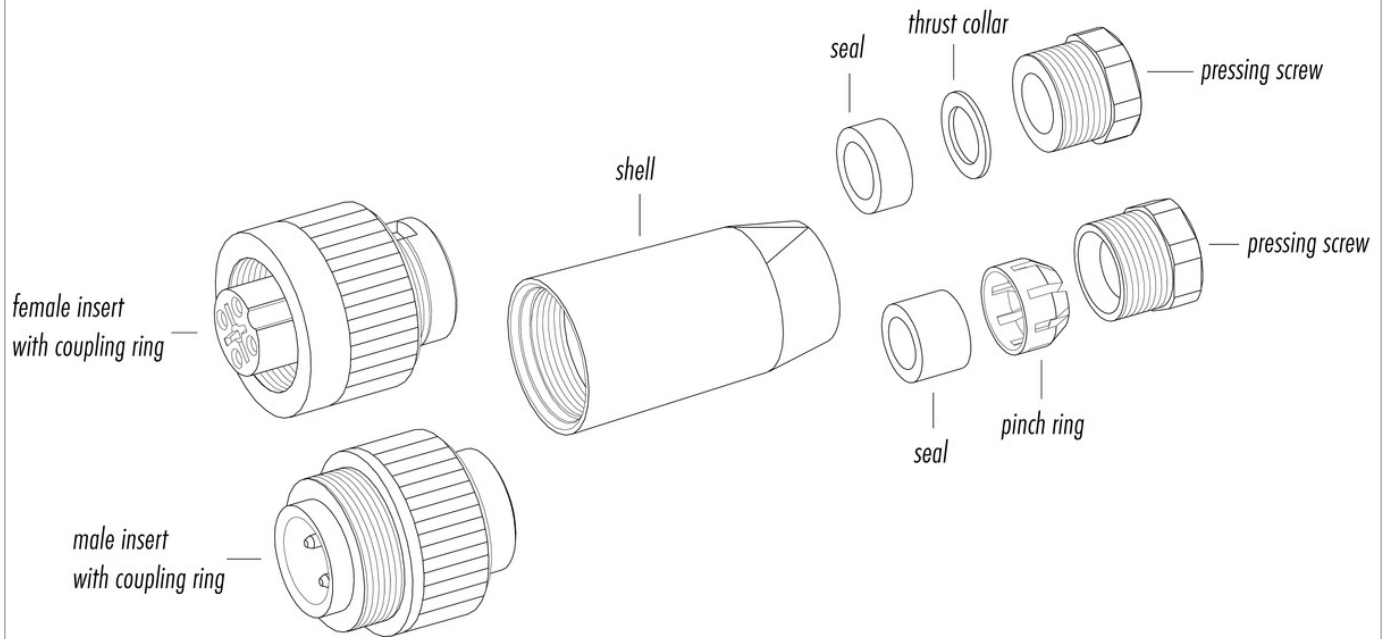

## Assembly instructions / Panel cut-out

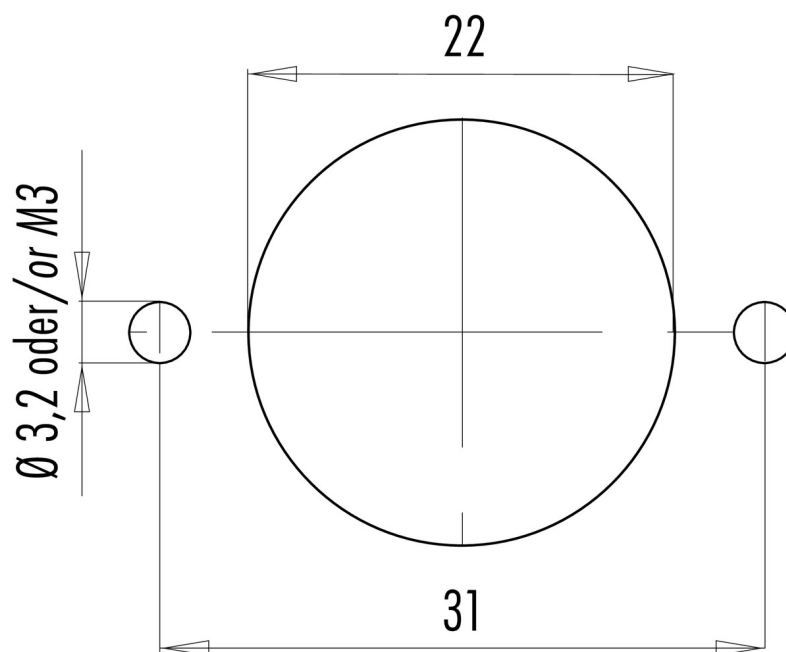

Product description	RD24 female cable connector, Contacts: 6+PE, 6.0 - 8.0 mm, unshielded, screw clamp, IP67, PG9
Area	RD24 series 692
Order number	99 0218 00 07

## Security notices

The connector must not be plugged or unplugged under load. Non-observance and improper use can result in personal injury.

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

To protect against unintentional opening of the connector, the thread between the housing and the connector head must be secured with a suitable cyanoacrylate adhesive when used in circuits with voltages dangerous to the touch. This does not apply to connectors used in SELV and PELV circuits according to IEC 61140 (EN 61140, VDE 0140-1).

Connectors which are used in circuits with voltages dangerous to the touch may only be installed and used by, or under the supervision of, persons with electrical engineering training, taking into account the applicable regulations and standards.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre. To lock the cable connector with the device connector, the threaded ring is tightened "hand-tight" (approx. 50 cNm).