
# Product data sheet Automation technology - sensors and actuators




Product description

M12-A male angled panel mount connector, Contacts: 8, shieldable, dip-solder, IP68, UL, for PCB assembly

Area Order number M12-A series 763 99 3481 601 08

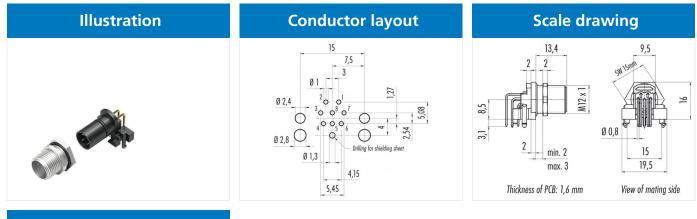

#### Contact arrangement (Plug-in side)



You can find the assembly instructions on the next page.

## **Technical data**

#### **General values**

#### Connector design

Connector locking system Termination Upper limit temperature Lower limit temperature Customs tariff number male angled panel mount connector screw dip-solder 85 °C -40 °C 85369010

### **Electrical values**

Rated current (40 °C) Rated voltage Rated impulse voltage Pollution degree Overvoltage category Insulating material group Insulation resistance EMC compliance Degree of protection Mechanical operation

#### **Material**

Contact material Contact plating Contact body material Housing material REACH SVHC

#### authorization/approvals

Approval 1

1.5 A (2 A UL) 30 V 800 V 3 II III >  $10^8 \Omega$ shieldable IP68 > 100 Mating cycles

CuZn (brass) Au (gold) PA CuZn (Brass nickel plated) CAS 7439-92-1 (Lead)

UL


# Product data sheet Automation technology - sensors and actuators



Product description

M12-A male angled panel mount connector, Contacts: 8, shieldable, dip-solder, IP68, UL, for PCB assembly

Area Order number M12-A series 763 99 3481 601 08

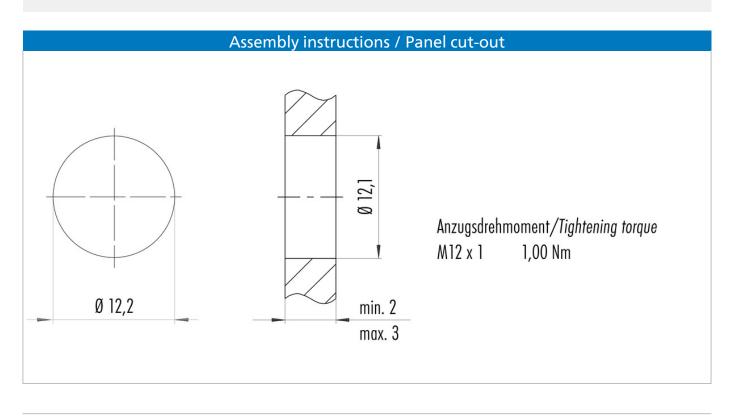



## Product data sheet Automation technology - sensors and actuators



Product description

M12-A male angled panel mount connector, Contacts: 8, shieldable, dip-solder, IP68, UL, for PCB assembly

Area Order number M12-A series 763 99 3481 601 08

### Security notices

The connectors have been developed for applications in plant engineering, control and electrical equipment construction. The user is responsible for checking whether the connectors can also be used in other areas of application.

Plug connectors with enclosure protection IP 67 and IP 68 are not suitable for use under water. When used outdoors, the plug connectors must be protected separately against corrosion. For further information on the IP protection classes, please refer to the "Technical Information" download centre.

