


Product **Contacts: 8, female cable connector**  
 Area **Snap-in IP67, subminiature Series**  
 Article number **99 9226 400 08**


### Illustration



### Scale drawing

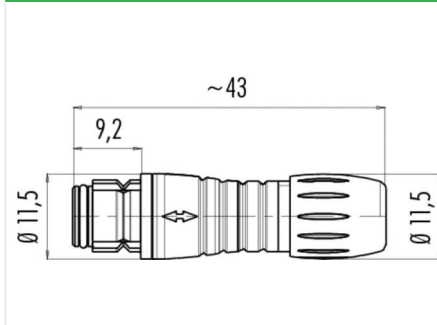

### Contact Arrangement

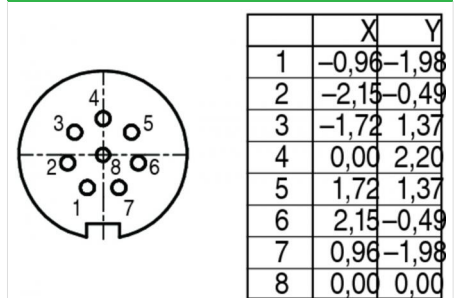

You can find the item description on the next page.

## Technical data

### General features

|                          |                        |
|--------------------------|------------------------|
| Connector Design         | Female cable connector |
| Connector locking system | snap                   |
| Termination              | solder                 |
| Wire gauge (mm)          | 0,25 mm <sup>2</sup>   |
| Wire gauge (AWG)         | 24                     |
| Cable outlet             | 3 - 5 mm               |
| Upper temperature        | 85 °C                  |
| Lower temperature        | -25 °C                 |

### Electrical parameters

|                       |                           |
|-----------------------|---------------------------|
| Rated voltage         | 63 V                      |
| Rated impulse voltage | 800 V                     |
| Pollution degree      | 2                         |
| Overvoltage category  | II                        |
| Material group        | II                        |
| Rated current (40°C)  | 1 A                       |
| Volume resistivity    | ≤ 3 mΩ                    |
| EMV compliance        | Shielding is not possible |
| Degree of protection  | IP67                      |

### Material

|                          |                |
|--------------------------|----------------|
| Material of contact      | CuSn (Bronze)  |
| Contact plating          | Au (gold)      |
| Material of contact body | PA (UL 94 V-0) |

Product **Contacts: 8, female cable connector**

Area **Snap-in IP67, subminiature Series**  
Article number **99 9226 400 08**

Item description

